
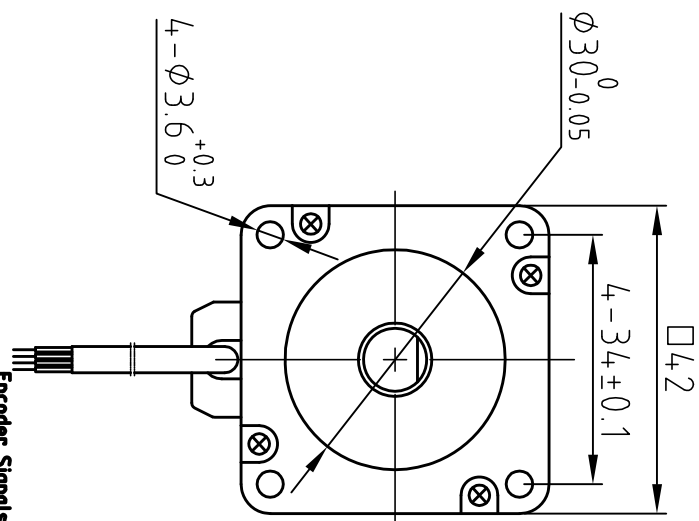


Dimension: (Unit: mm)

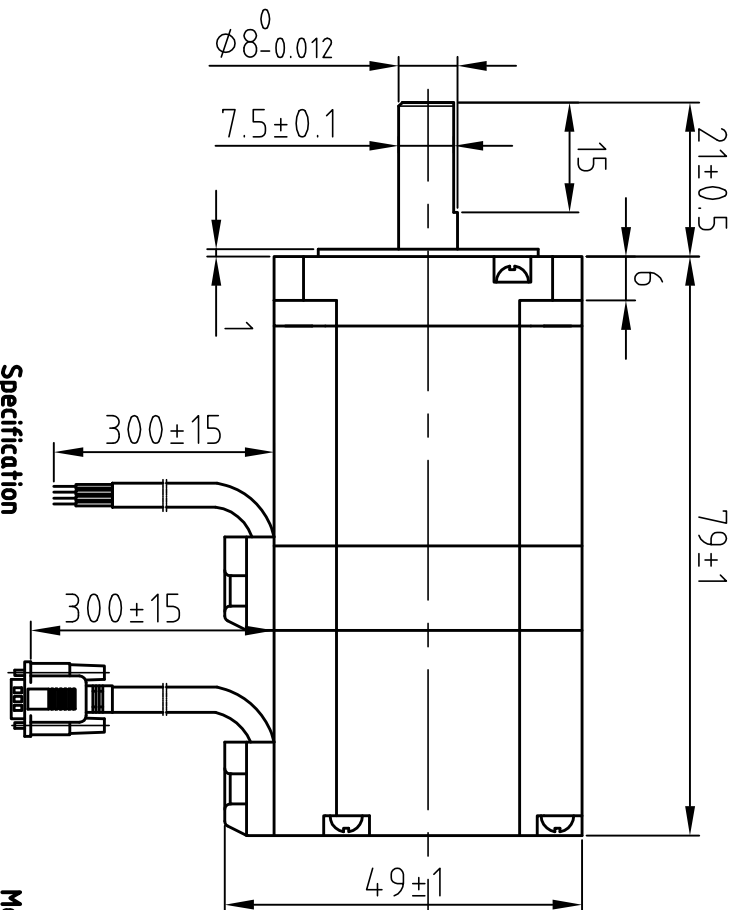



Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmm(500VDC)
Insulation class	B
Temp rise(Max)	85K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	2.3 A
Voltage	2.3 V
DC Resistance/phase	±10% 1.0 Ω
Inductance/phase	±20% 1.9 mH
Holding torque	0.5 N•M
Inertia	0.077 kg•cm ²
Weight	0.53 kg
Encoder Resolution	2000 cpr

Motor Connections

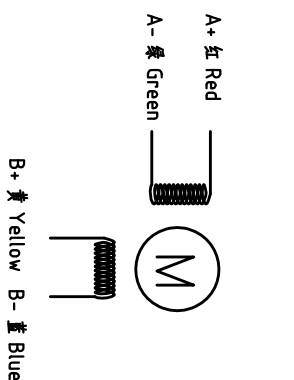

PIN	1	2	3	7	8	11	12	13
顏色	黑	紅	白	橙	灰	黃	綠	藍
代號	A+	VCC	GND	Z+	Z-	B+	B-	A-

设计		王洪松	日期	17.7.4	材料 Material				深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
Designed			Date									
审核		秦军	17.7.4	第一角画法 First Angle projection			名称 Title		混合伺服电机			
Checked												
批准		田天胜	17.7.4	重量 Weight		比例 Scale	修改标记 Stape Mark	图号 DWG. NO.		LS-HBM42-01-0010-02		
Approved												
审核人 Drawn No.				共 1 张 第 1 张		Sheet 1 of 1						

[illegible]