

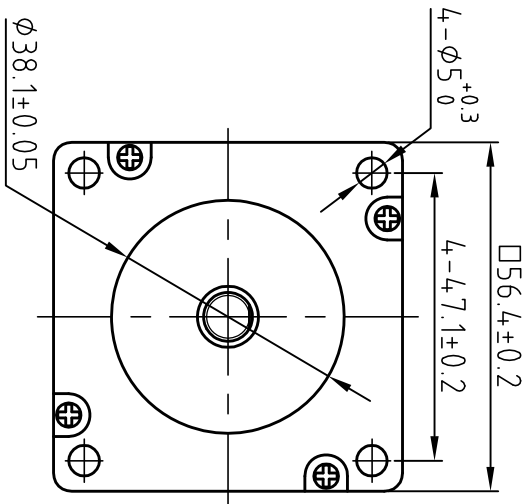


版本 Rev	日期 Date	变更文件号 ECH NO.	变更内容 Revisions	设计 By
V1.0	17.7.7		新增	王秋林


Dimension: (Unit: mm)

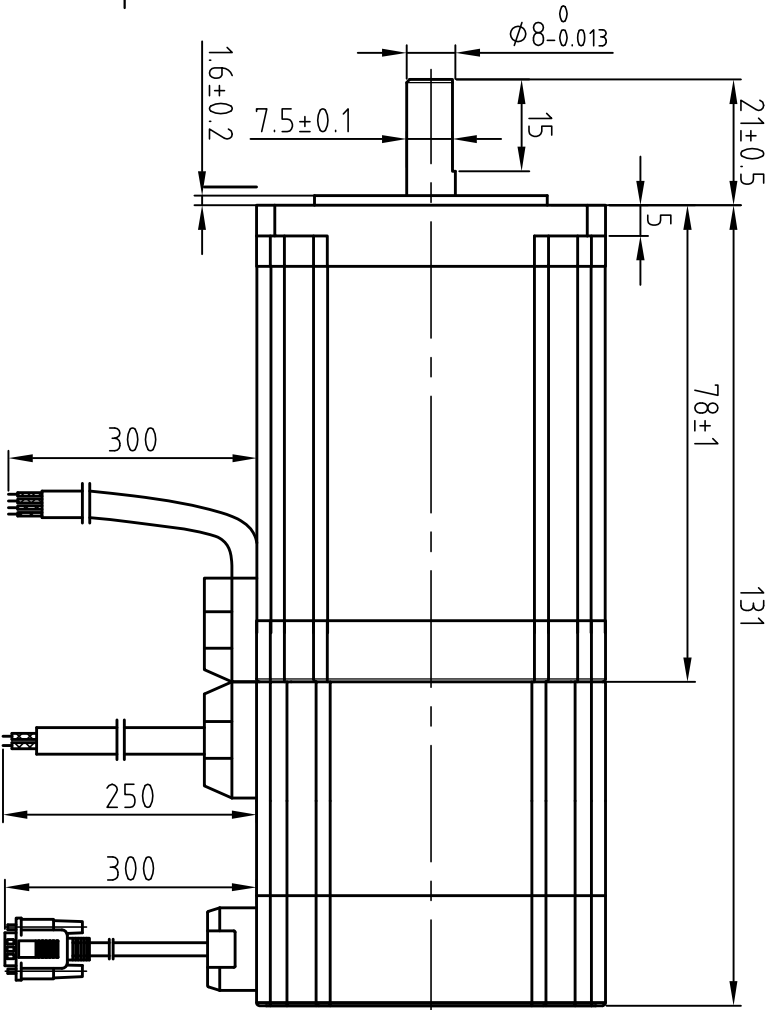

Motor Connections:

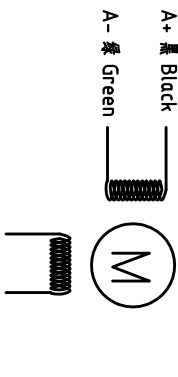

Encoder Signals




Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Motor Specification:

Current/phase	5 A
Voltage	2.3 V
DC Resistance/phase ±10%	0.55 Ω
Inductance/phase ±20%	2.0 mH
Holding torque	2.1 N·M
Inertia	0.5 kg·cm ²
Weight	165 kg
Encoder Resolution	1000 cpr

Brake Connctions



Brake Specification:

Voltage	24Vdc
Friction torque	1N·M

PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

设计	王洪松	日期	2017.7.7	材料				深圳市雷赛智能控制股份有限公司
Designed		Date		Material				SHEENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核	秦军		2017.7.7	第一角画法				带抱闸混合伺服电机
Checked				First Angle projection				
批准	田天胜		2017.7.7	重量	比例	图例	Stage Mark	
Approved				Weight	Scale			57HSM24-BZ-E1
图号				重量	比例	图例	Stage Mark	LS-HSM57-03-0111-01
Part No.				Scale				
				共 1 套	第 1 套	Sheet 1 of 1	DWG. NO.	