
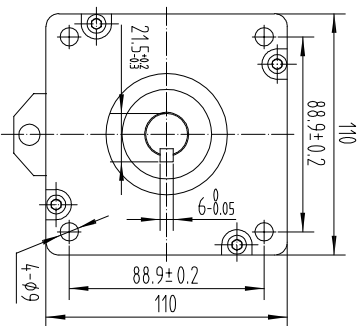


Dimension: (Unit: mm)

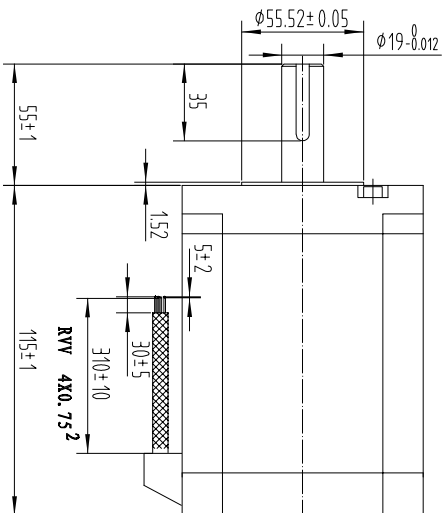


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6 A
Voltage	3.6V
DC Resistance/phase	0.44 Ω
Inductance/phase	7.17 mH
Holding torque	12 N•M
Inertia	8.5kg•cm ²
Weight	

Motor Connections

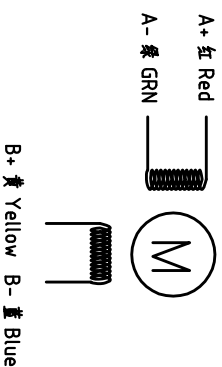

设计 Designed	王洪勃	日期 Date	19.7.1	材料 Material	第一角画法 First Angle projection	标题 Title	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄维强	19.7.1		重量 Weight	比例 Scale	图例 Legend	混合式步进马达
批准 Approved	黄维强	19.7.1		重量 Weight	比例 Scale	图例 Legend	110CM12
零件号 Part No.	LS-MT-01-07A	共 1 页 第 1 页	Sheet 1 of 1	图号 DWG. NO.	LS-110CM12		

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.5.19		新版	王洪勃
V2.0	19.7.1		增加压线块	王洪勃