
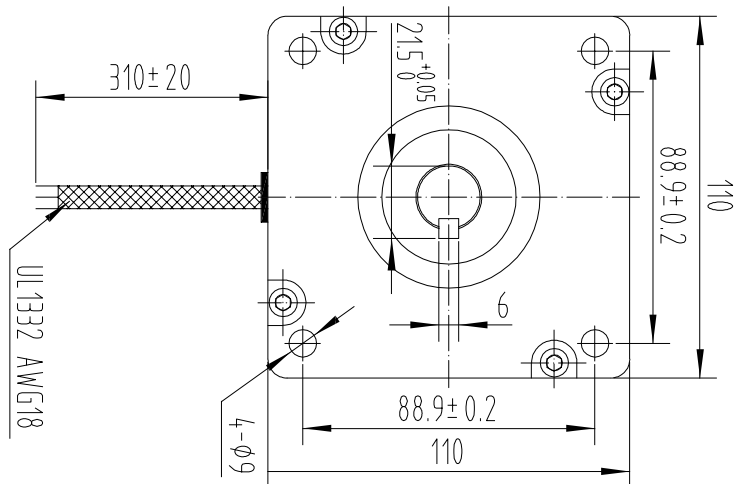


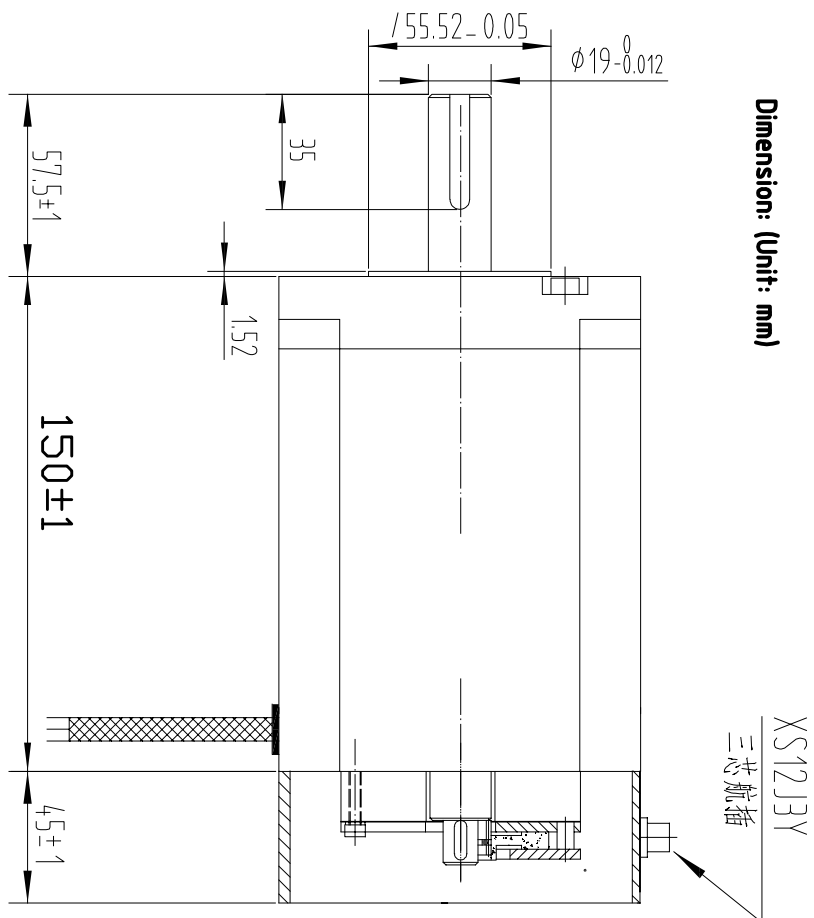

版本 Version	日期 Date	交叉文件号 ECN NO.	交叉内容 Revisions	设计 By
V1.0	19.5.19		新版	王洪林

Dimension: (Unit: mm)

XS12J3Y

三航插

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Common Rating

Current/phase	6.5 A
Voltage	3.6V
DC Resistance/phase	0.67 Ω
Inductance/phase	13.12 mH
Holding torque	20 N • M
Inertia	10.9kg • cm ²
Weight	9.75 kg

Specification

A+ 红 Red
A- 绿 GRN
B+ 黄 Yellow
B- 蓝 Blue

Motor Connections

设计	王瑞松	日期	9.5.19	材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
Desigined		Date		Material				
审核	李桂华		19.5.19	第一角画法 First Angle projection				
Checked				重量 Weight	比例 Scale	标识标记 Stage Mark		
批准	李桂华		19.5.19					
Approved								
料号 Part No.				共 1 套 第 1 套	Sheet	1 of 1		
					表样编号为: LS-MT-01-07A			

[illegible]