
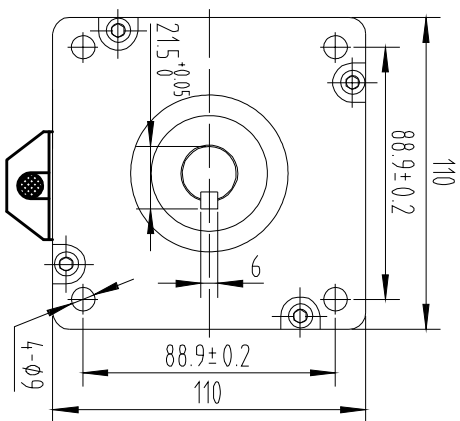


Dimension: (Unit: mm)

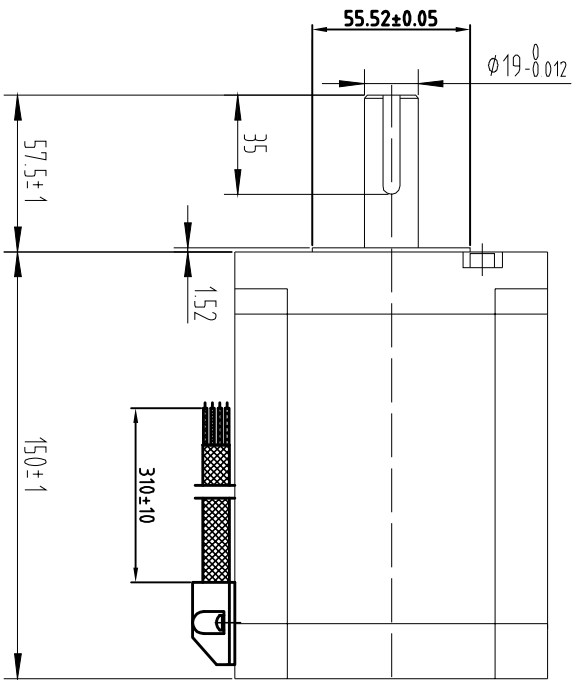


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.5 A
Voltage	3.6V
DC Resistance/phase	0.72 Ω
Inductance/phase	13 mH
Holding torque	20 N·M
Inertia	10.9kg·cm²
Weight	8.4 kg

Motor Connections

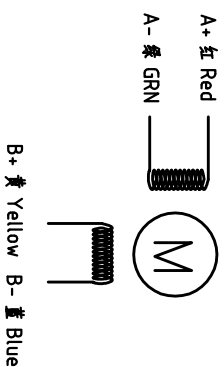

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.5.19		新版	王洪松
V2.0	19.7.1		增加压线块	王洪松

设计 Designed	王洪松	日期 Date	19.7.1	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄雄波		19.7.1	第一角画法 First Angle projection	混合式步进马达
批准 Approved	黄雄波		19.7.1	重量 Weight	110CM20 MS20
零件号 Part No.	LS-MT-01-07A	共 1 套 Total	第 1 套 Sheet 1 of 1	图号 DWG. NO.	LS-110CM20 MS20