

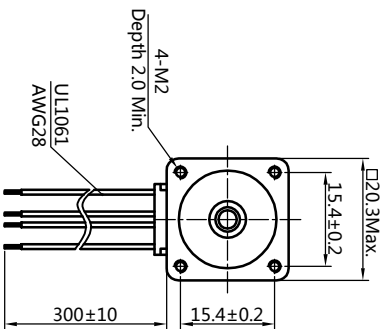


Dimension: (Unit: mm)

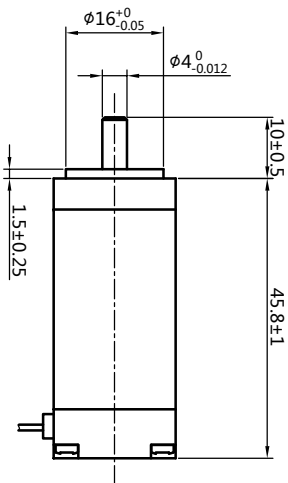

Motor Conetions:



B+ 红 Red B- 蓝 Blue

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	0.6 A (Peak Current)
Voltage	4.2V
DC Resistance/phase ±10%	7 Ω
Inductance/phase ±20%	3.4, mH
Holding torque	0.05 N·M
Inertia	0.038 kg·cm ²
Weight	0.1 kg

设计 Designed	王洪林	日期 Date	2018.01.22	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰	2018.01.22	第一角画法 First Angle projection	图例 Title	混合式步进电机
批准 Approved	田天胜	2018.01.22	重量 Weight	比例 Scale	20CM005
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.			