

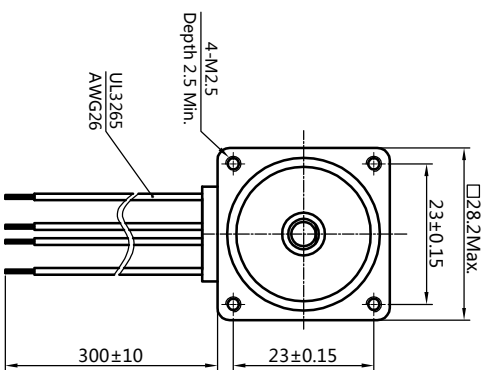


Dimension: (Unit: mm)

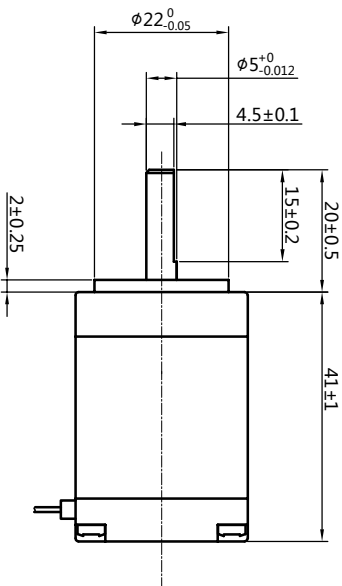

Motor Conections:

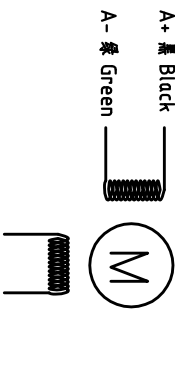

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	1.2 A (Peak Current)
Voltage	1.7V
DC Resistance/phase ±10%	1.8 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	0.1 N·M
Inertia	0.13 kg·cm ²
Weight	0.16 kg

设计 Designed	王琳琳	日期 Date	2018.01.22	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰	2018.01.22	第一角画法 First Angle projection	图例 Symbol	混合式步进电机
批准 Approved	田天胜	2018.01.22	重量 Weight	比例 Scale	28CM010
图号 Part No.			共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	