

Hybrid Stepping Motor

Type: **35HS01**

Rev: 您

Date: 20080306

● COMMON RATINGS

Step angle: 1.8°

Positional accuracy: $\pm 5\%$

Number of Phase: 2

Temperature rise: 80°C MAX

Inertia: gcm²

Dielectric strength: 500VAC

Insulation resistance: 100Mohm (500VAC)

Radial play:

Insulating class: B


Weight: 0.14 kg

● SPECIFICATIONS

Holding torque (2 phases on) kg. cm	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) $\pm 10\%$	Voltage Current/Phase (V DC)	Phase Inductance (mH) $\pm 20\%$ (1KHz) Typicat
0.7	0.4	35	14	16

● DIMENSIONS unit=mm

● CONNECTIONS

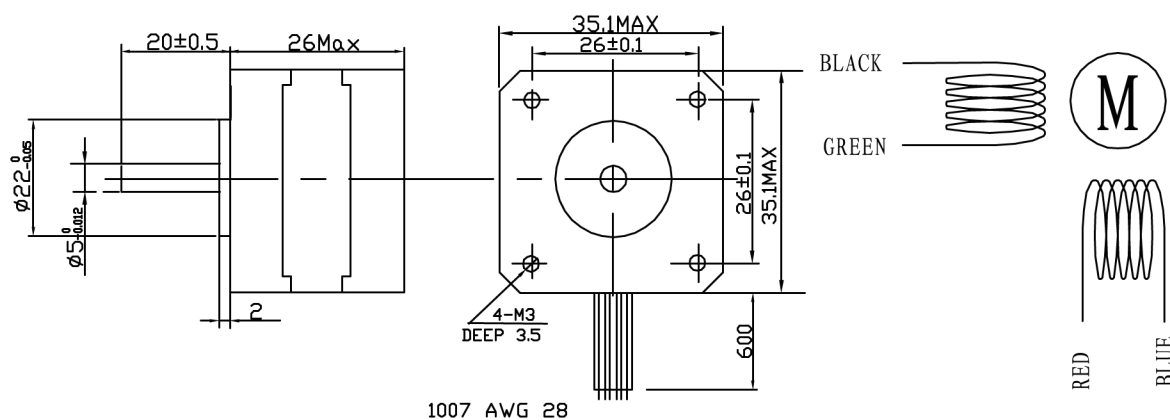

						35HS01			技术规格书	
标记	处数	分区	更改文件号	签名	日期					
设计			标准化			阶段	标记	重量	比例	
审核										
工艺			批准			共	张	第	张	深圳市雷赛智能控制股份有限公司