

Hybrid Stepping Motor

Type: **39HS02**

Rev: 您

Date: 20080310

COMMON RATINGS



Step angle: 1.8°	Dielectric strength: 500VAC
Positional accuracy: $\pm 5\%$	Insulation resistance: 100Mohm (500VAC)
Number of Phase: 2	Radial play:
Temperature rise: 80°C MAX	Insulating class: B
Rotor Inertia: gcm^2	Weight: 0.20 kg

SPECIFICATIONS

Holding torque (2 phases on) kg. cm	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) $\pm 10\%$	Voltage Current/Phase (V DC)	Phase Inductance (mH) $\pm 20\%$ (1KHz) Typical
2.2	0.6	15	9	16

DIMENSIONS unit=mm

CONNECTIONS

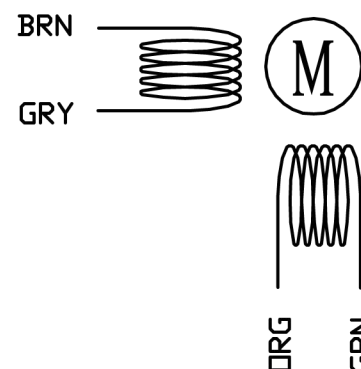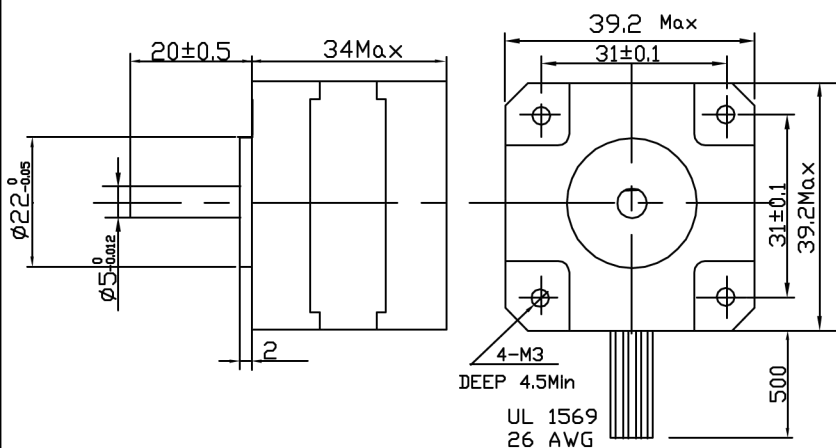

						39HS02	技术规格书		
标记	处数	分区	更改文件号	签名	日期	阶段	标记	重量	比例
设计			标准化						
审核									
工艺			批准			共	张	第	张
						深圳市雷赛智能控制股份有限公司			