

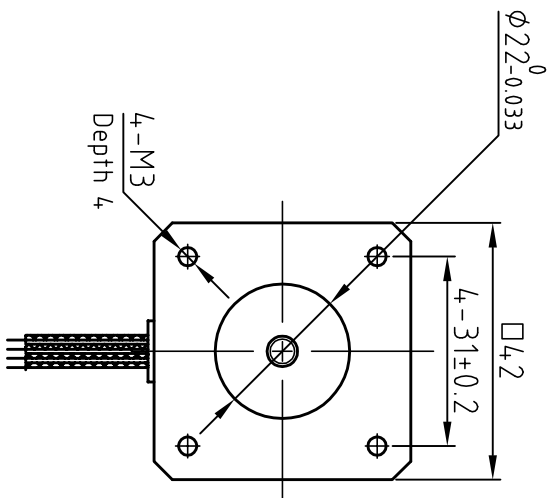


Dimension: (Unit: mm)

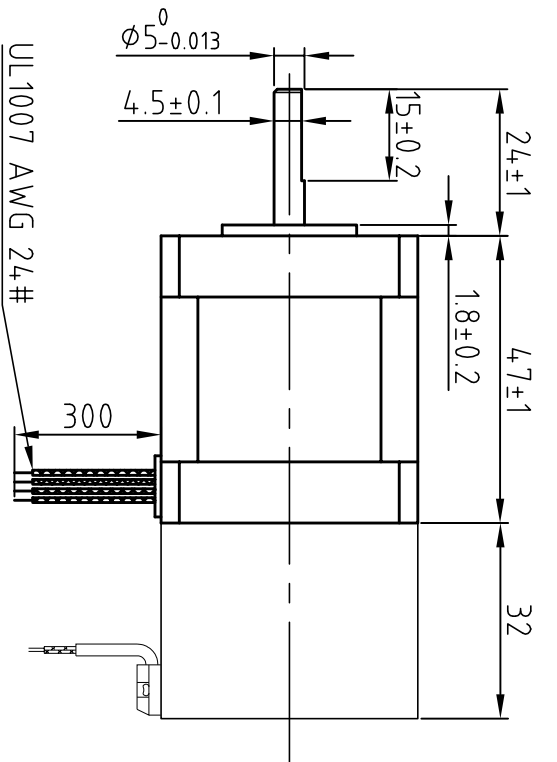

Motor Conections:

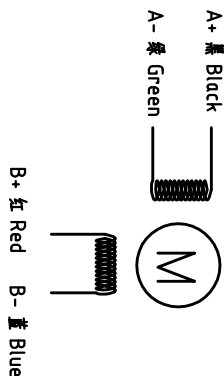

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	2.0 A
Voltage	2.3 V
DC Resistance/phase ±10%	1.35Ω
Inductance/phase ±20%	3.2 mH
Holding torque	0.6 N·M
Inertia	0.072 kg·cm ²
Weight	0.56 kg

设计 Designed	王洪松	日期 Date	18.10.19	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	18.10.19		第一角画法 First Angle projection	混合式步进电机
批准 Approved	黄捷建	18.10.19		重量/Weight 比例/Scale 修改标记/Stage Mark	42CM06-BZ
图号 Part No.		共 1 页 第 1 页	Sheet 1 of 1	图号 DWG. NO.	