

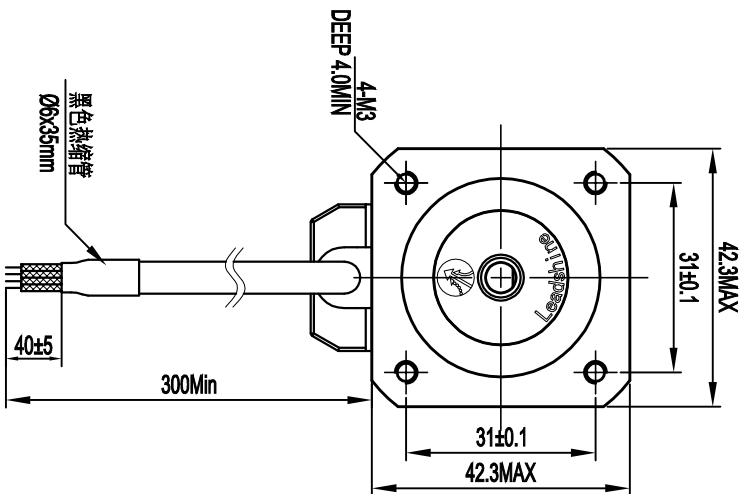
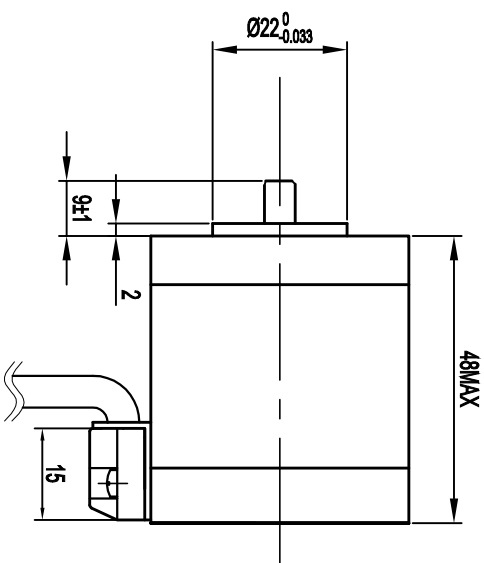


DIMENSIONS Unit:mm

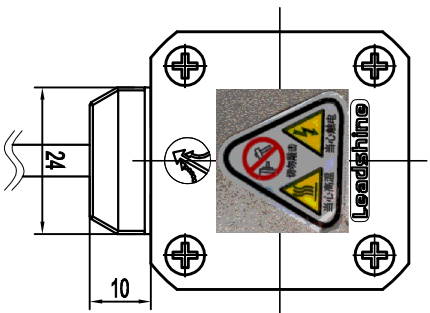

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	2.3 V
DC Resistance/phase ±10%	0.9 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	60 N·CM
Inertia	0.072 kg·cm ²
Weight	0.35 kg

设计 日期 2020.04.16	材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 日期 2020.04.16	第一角画法 First Angle projection	混合式步进电机
批准 日期 2020.04.16	版本/版次 A/01	4.2CM06-S9 MS20
零件号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1
图号 DWG. NO.	LS-4.2CM06-S9 MS20	

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.16		初版	王洪林