

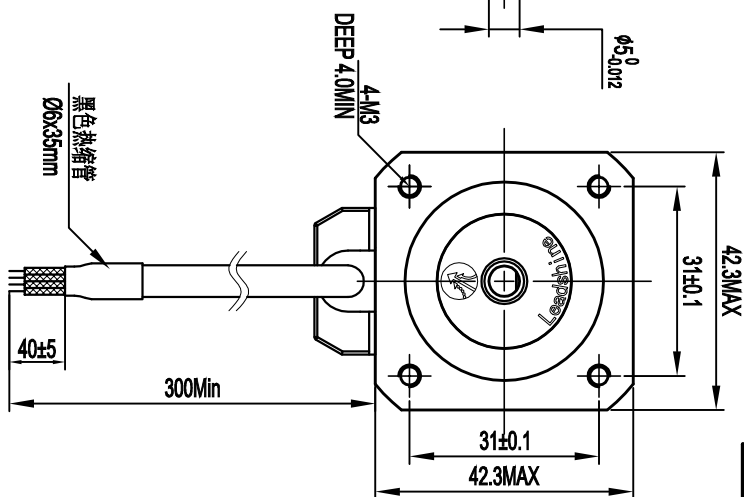

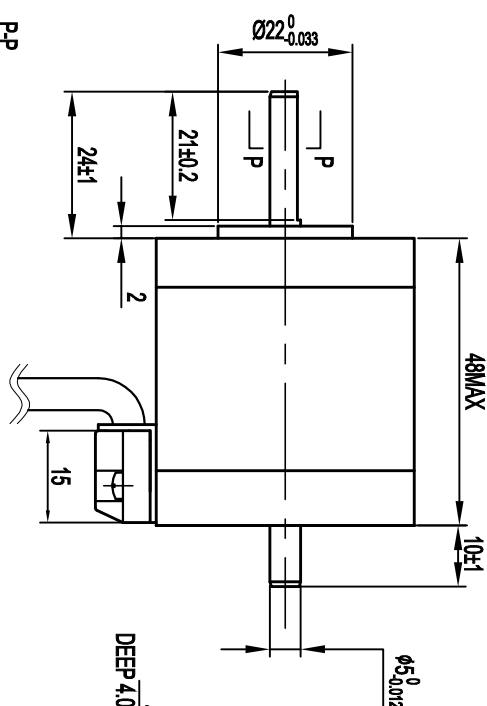


DIMENSIONS Unit=mm

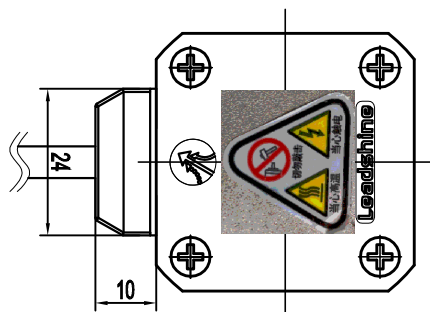

版本 Rev.	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 by
V1.0	20.04.16		初版	王洪彬

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 450g)
Axial play	Max.0.08mm(load 900g)

Current/phase	2.5 A
Voltage	2.3 V
DC Resistance/phase $\pm 10\%$	0.9 Ω
Inductance/phase $\pm 20\%$	1.6 mH
Holding torque	60 N • CM
Inertia	0.072 kg • cm ²
Weight	0.35 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
5-21-2023	2020.04.16					
审核 Checked	2020.04.16	第一角画法 First Angle projection	名称 Title			
黄捷建			混合式步进电机			
批准 Approved	2020.04.16	版本/版次 A/01	比例 Scale	数量/标识 Quantity/Mark	图号 DWG. NO.	
黄捷建					LS-42CM06-SZ MS20	
零件编号 Part No.	LS-MT-01-07A	共 1 套 第 1 套	Sheet 1 of 1	图号 DWG. NO.	LS-42CM06-SZ MS20	