




DIMENSIONS Unit:mm

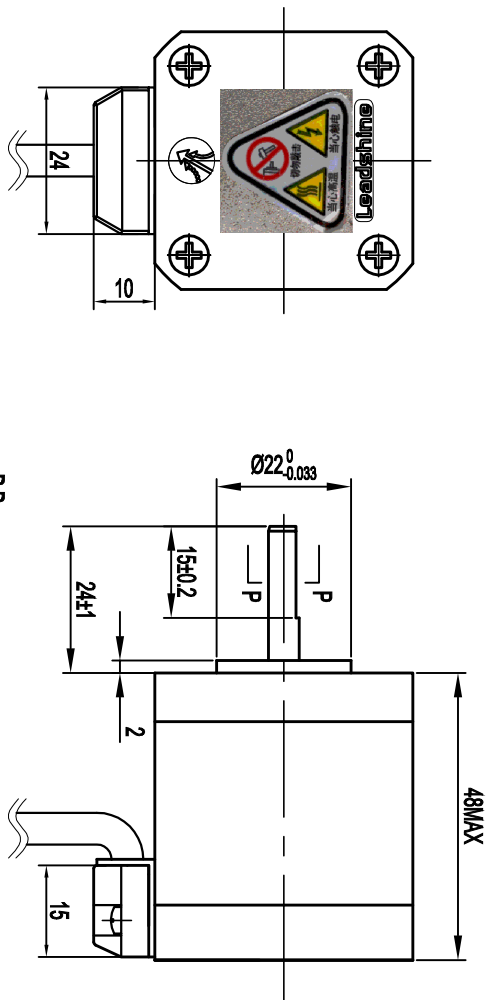


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	2.3 V
DC Resistance/phase ±10%	0.9 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	60 N·CM
Inertia	0.072 kg·cm ²
Weight	0.35 kg

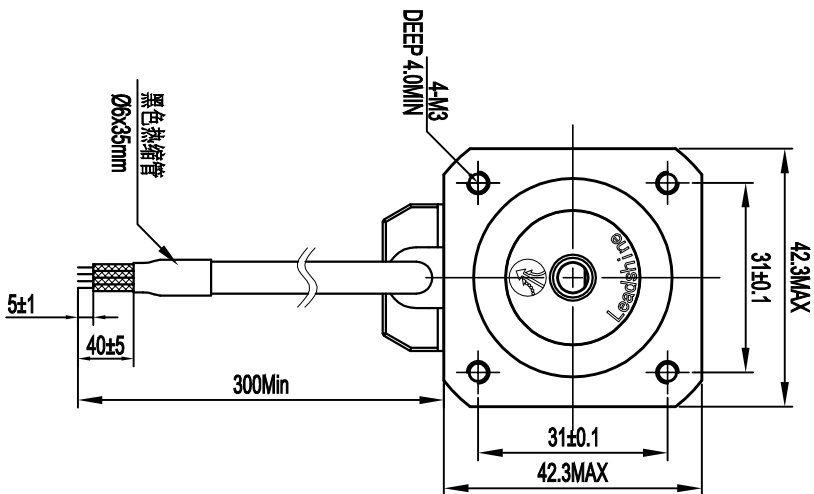

□ 电机接线图



设计 2020.04.16	日期 2020.04.16	材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 2020.04.16	2020.04.16	第一角画法 First Angle projection	混合式步进电机
批准 2020.04.16	2020.04.16	版本/版次 A/01	42CM06 MS20
零件号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO. LS-42CM06 MS20

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.16		初版	王洪林