



Dimension: (Unit: mm)

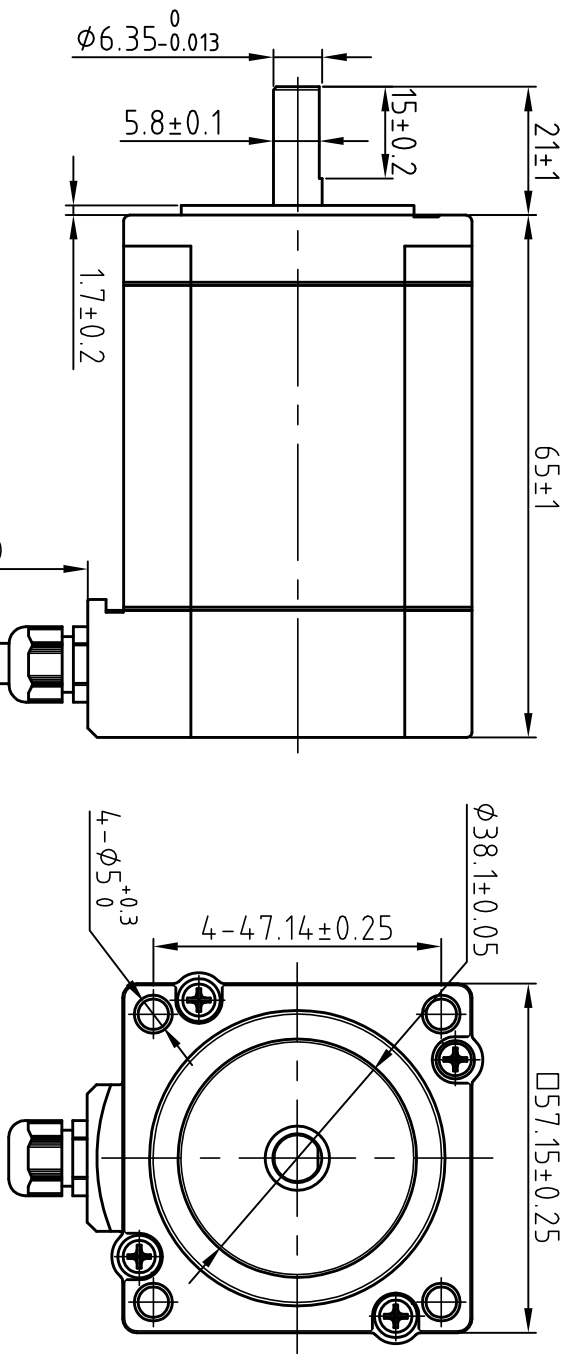

Motor Conections:

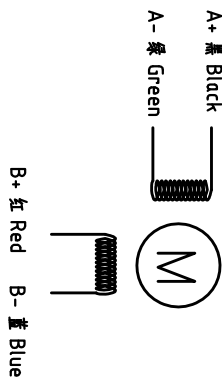

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Protection level	IP65
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	3.0 A
Voltage	2.2 V
DC Resistance/phase ±10%	0.74, Ω
Inductance/phase ±20%	2.4 mH
Holding torque	1.2 N·M
Inertia	0.28 kg·cm ²
Weight	0.95kg

设计 Designed	王洪松	日期 Date	2017.10.30	材料 Material	塑料
审核 Checked	刘佩峰	2017.10.30	第一角画法 First angle projection	比例 Scale	1:1
批准 Approved	田天胜	2017.10.30	重量 Weight	比例 Scale	1:1
图号 Part No.			共 1 页 第 1 页 Sheet 1 of 1	图样 DWG. NO.	57CM13-FS

深圳市雷赛智能控制股份有限公司
SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
混合式步进电机