
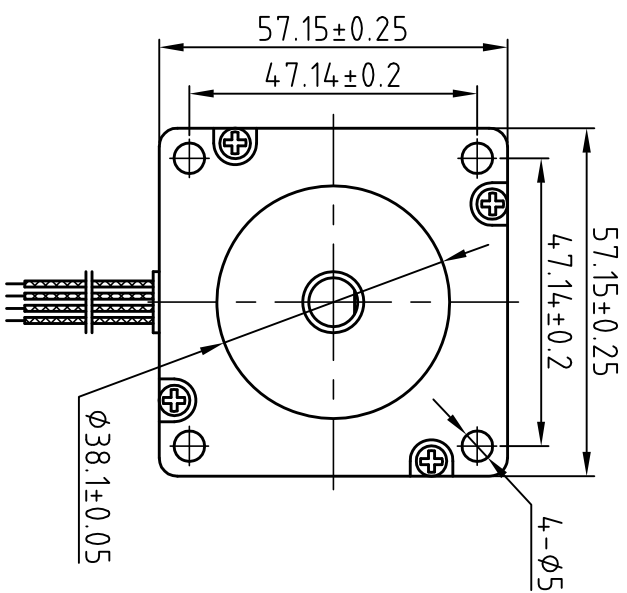


Dimension: (Unit: mm)

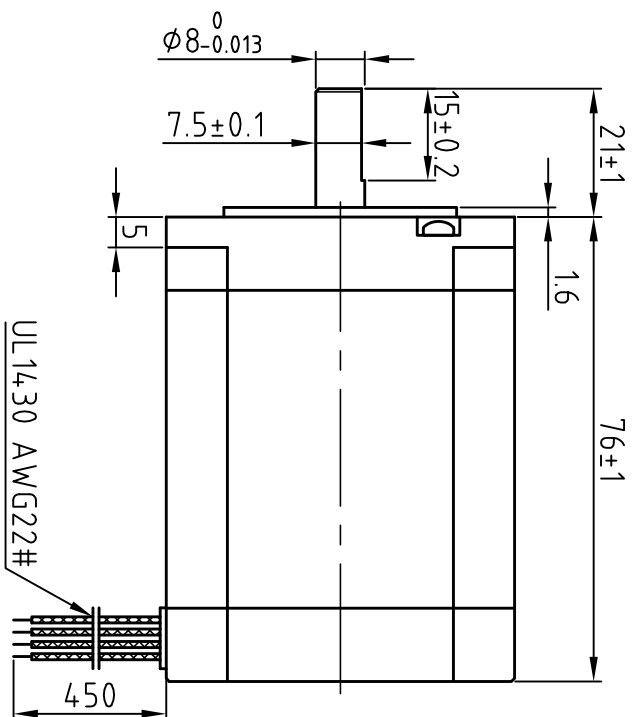

Motor Connections:

A+ 黒 Black

A- 緑 Green



B+ 红 Red B- 蓝 Blue

版本 Rev	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By
	17.04.10		制定标准 A	王洪林

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 450g)
Axial play	Max.0.08mm(load 900g)

Common Rating

Current/phase	4.0 A
Voltage	2.4 V
DC Resistance/phase $\pm 10\%$	0.6 Ω
Inductance/phase $\pm 20\%$	2.4 mH
Holding torque	2.2 N • M
Inertia	0.48 kg • cm ²
Weight	1.0 kg

Specification:

设计		材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
Designed	王秋林	日期	17.04.10			
		Date				
审核	刘峰峰		第一角画法 First Angle projection			
Checked		17.04.10				
批准	田天廷		重量 Weight			
Approved		17.04.10	比例 Scale			
			阶段标志 Stage Mark			
序号			图号			
Part No.			DWG. NO.			
	共 1 张	第 1 张	Sheet 1 of 1			