

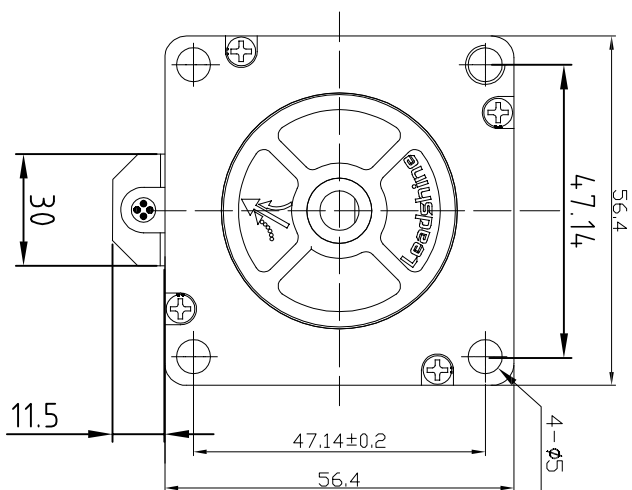


Dimension: (Unit: mm)

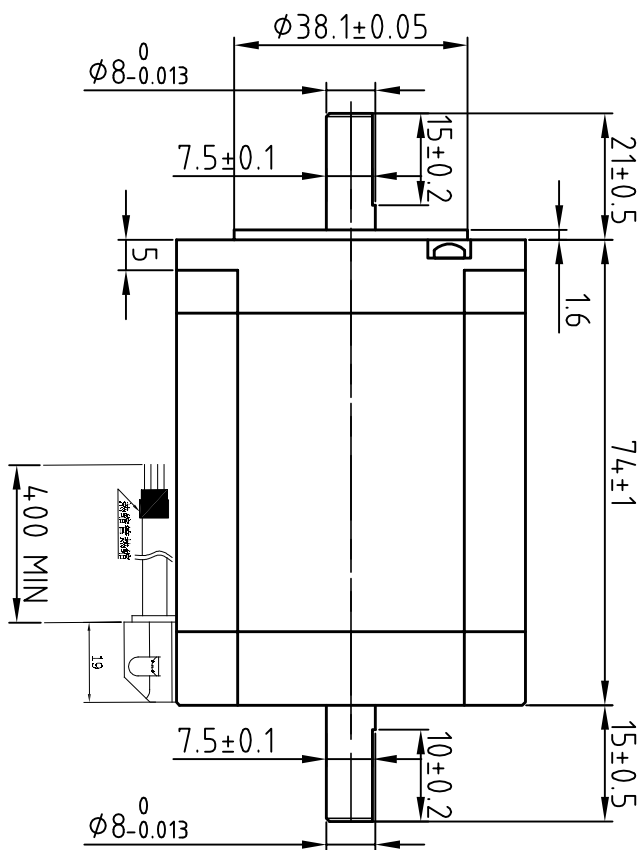

Motor Connctions:

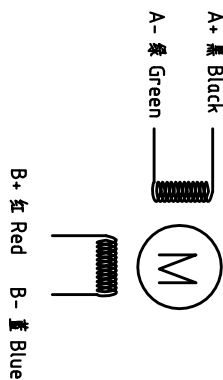

Common Rating

Step angle	1.8°
Position accuracy	18±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.38 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	2.2 N·M
Detent torque	0.068 N·M
Inertia	0.480 kg·cm ²
Weight	1.1 kg

设计 Designed	王洪松	日期 Date	2020.02.14	材料 Material	塑料
审核 Checked	黄捷建		2020.02.14	第一角画法 First angle projection	混合式步进电机
批准 Approved	黄捷建	2020.02.14		重量 Weight	57CM22C-SZ
零件图 Part No.	LS-MT-01-07A	共 1 张 第 1 张	Sheet 1 of 1	图号 DWG. NO.	LS-57CM22C-SZ