

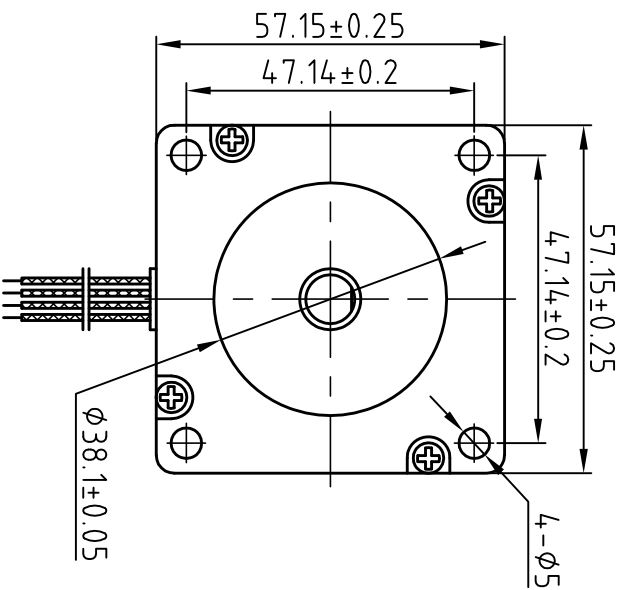


Dimension: (Unit: mm)

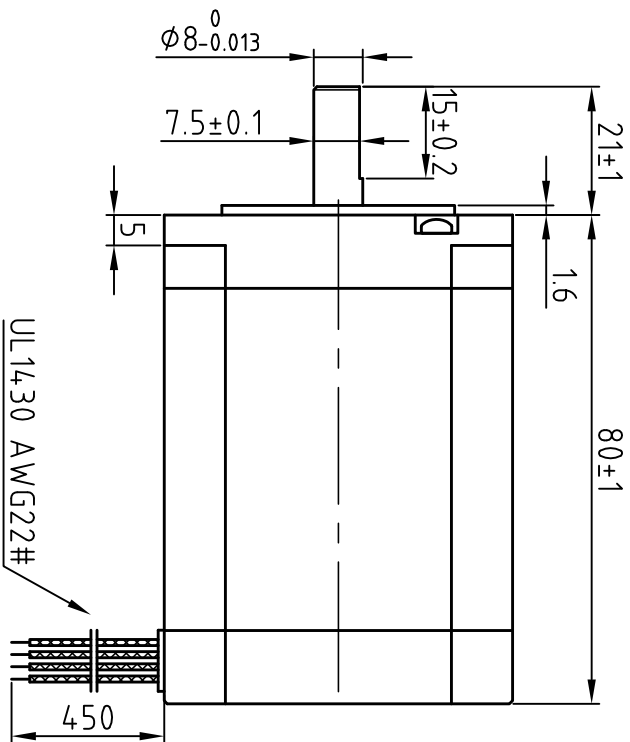

Motor Conetions:

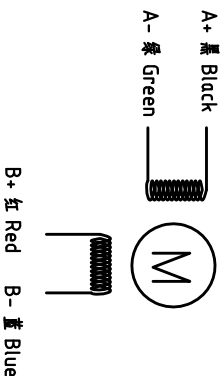

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	4.8 A
Voltage	1.6 V
DC Resistance/phase ±10%	0.34 Ω
Inductance/phase ±20%	1.74 mH
Holding torque	2.3 N·M
Inertia	0.48 kg·cm ²
Weight	1.1 kg

设计 Designed	王林林	日期 Date	17.04.10	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘峰峰	17.04.10	第一角画法 First Angle projection	比例 Scale	混合式步进电机
批准 Approved	田天雄	17.04.10	重量 Weight	比例 Scale	57CM22X
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1			图号 DWG. NO.	

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
	17.04.10		长度80mm, 4线电机	王林林