
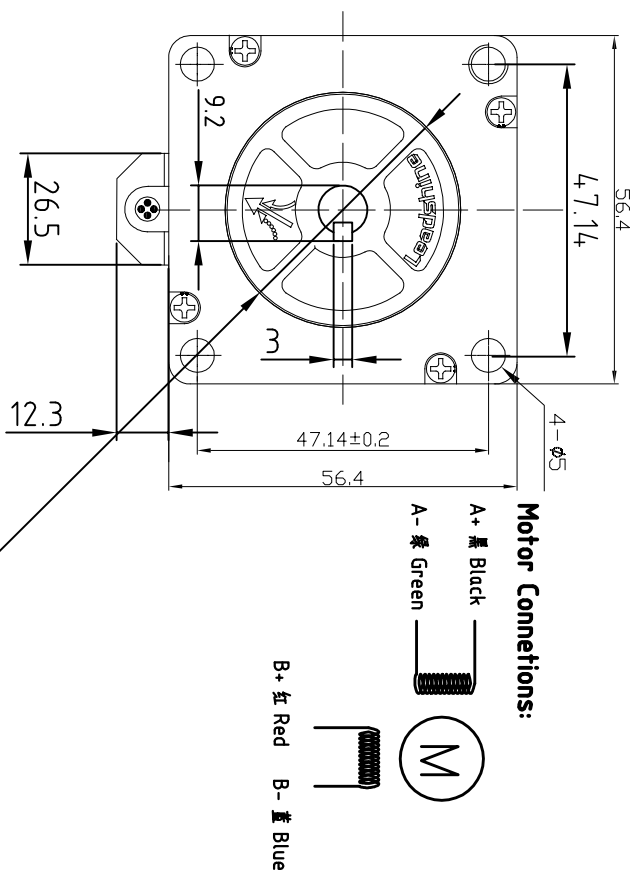


Dimension: (Unit: mm)

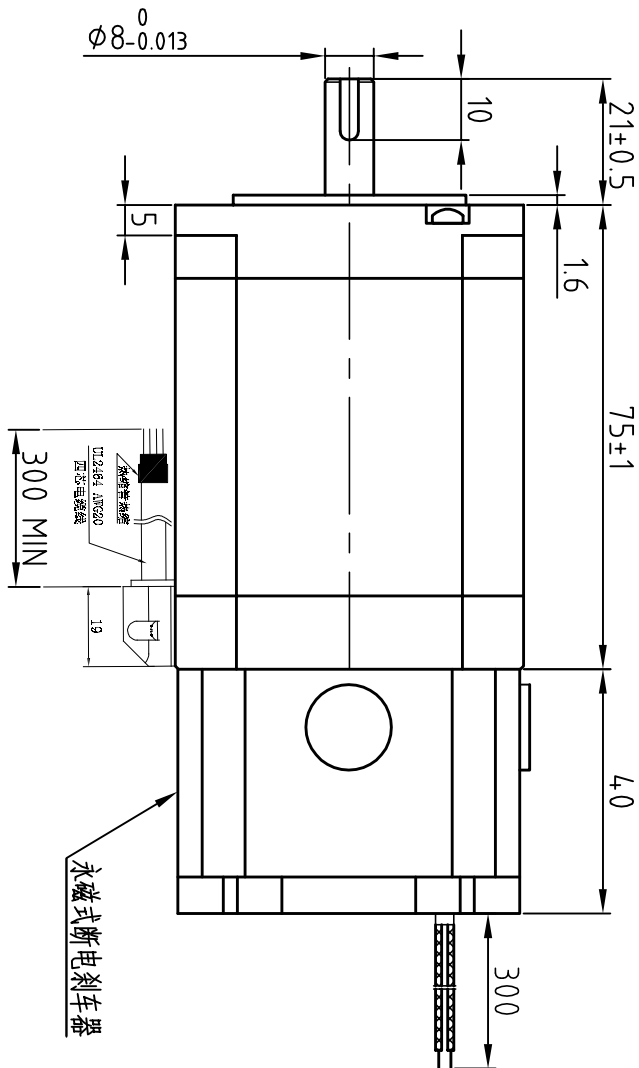

Common Rating

Step angle	1.8°
Position accuracy	18±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.38 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	2.3 N·M
Detent torque	0.068 N·M
Inertia	0.480 kg·cm ²
Weight	1.1 kg

设计 Designed	王洪松	日期 Date	2020.10.31	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2020.10.31	第一角画法 First Angle projection	比例 Scale	混合式步进电机
批准 Approved	黄捷建	2020.10.31	版本/版次 Ver./Ver.	图例/图例 Legend	57CM23-BZ-K
零件号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Total 1 of 1	Sheet 1 of 1	图号 DWG. NO.	LS-57CM23-BZ-K