
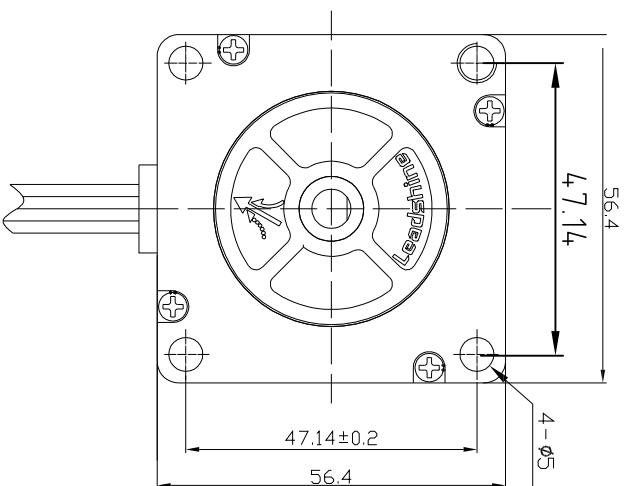


Dimension: (Unit: mm)

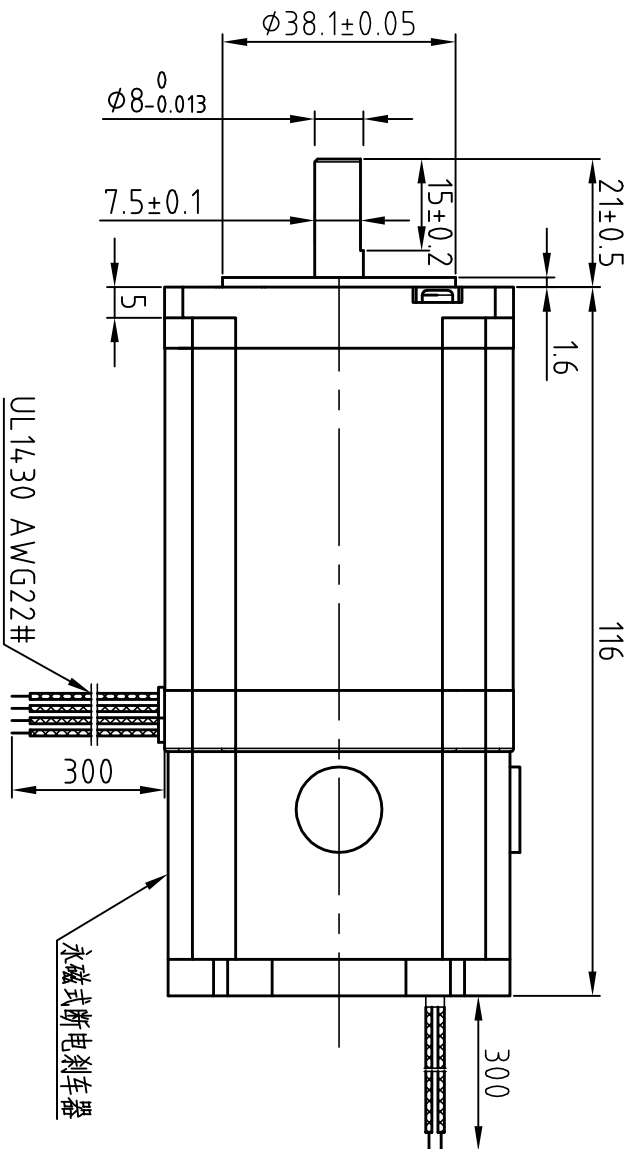

Motor Specification


Step angle	18°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)
Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.38 Ω
Inductance/phase ±20%	1.75 mH
Holding torque	2.3N·M
Inertia	0.48 kg·cm ²
Weight	1.3 kg

Brake Specification:

Static friction torque	2 N·M
Voltage	24 V
Wattage	4 W
Armature pull in time	0.03 S
Armature release time	0.01 S
Rotating inertia	0.019 kg·cm ²
Weight	0.3 kg
Heat resistance class	F

Motor Connctions:

A+ 黑 Black
A- 绿 Green



B+ 红 Red B- 蓝 Blue

Brake Connctions:

红 Red 黑 Black
+ -



设计 Designed	王洪松	日期 Date	17.10.30	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		17.10.30	第一角画法 First Angle projection	
批准 Approved	田天胜		17.10.30	重量/Weight	57CM23-BZ
				比例/Scale	
				修改/Revision	
				图号 DWG. NO.	
				共 1 页 第 1 页 Sheet 1 of 1	

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By