



Dimension: (Unit: mm)

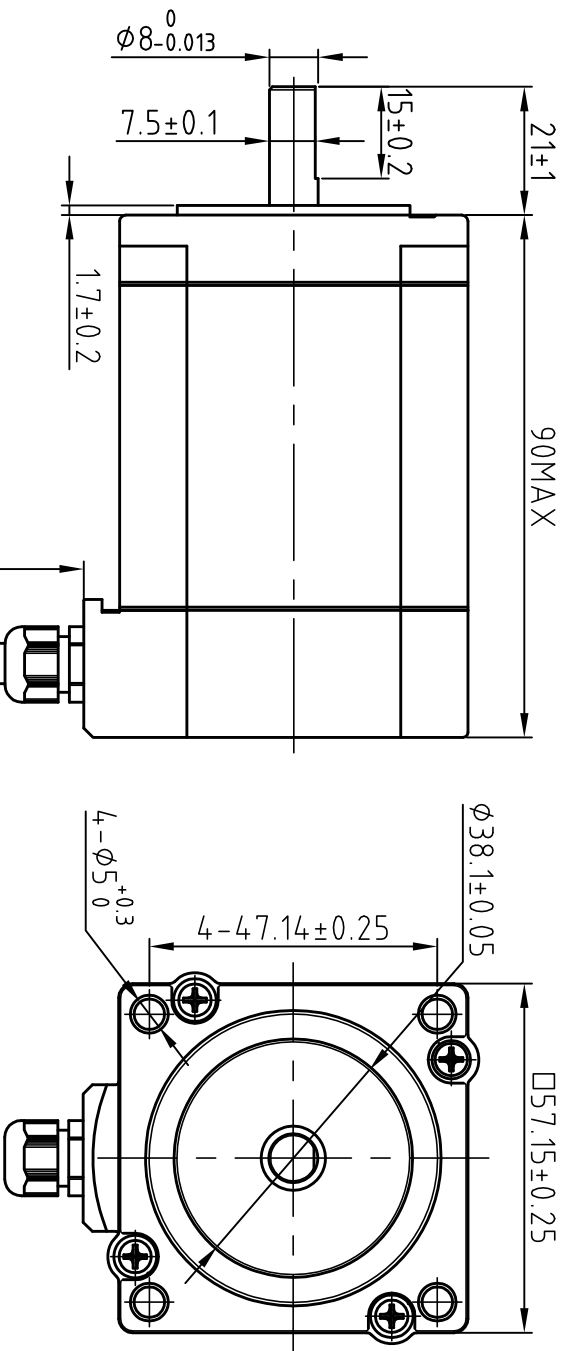

Motor Conections:

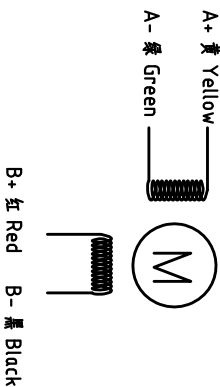


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Protection level	IP65
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	3.0 A
Voltage	4 V
DC Resistance/phase ±10%	1.3 Ω
Inductance/phase ±20%	4.4 mH
Holding torque	2.1 N·M
Inertia	0.48 kg·cm ²
Weight	1.3 kg

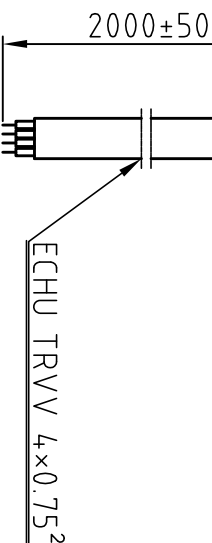

设计 Designed	王洪松	日期 Date	2017.10.30	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰	第一角画法 First Angle projection	2017.10.30	比例 Scale	混合式步进电机
批准 Approved	田天胜	重量 Weight	2017.10.30	阶段标记 Stage Mark	57CM23-FS
图号 Part No.		共 1 页 第 1 页 Sheet 1 of 1		图样 DWG. NO.	

版本 Rev	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By
V1.0	17.10.30		防水型步进电机	王洪松