


Dimension: (Unit: mm)

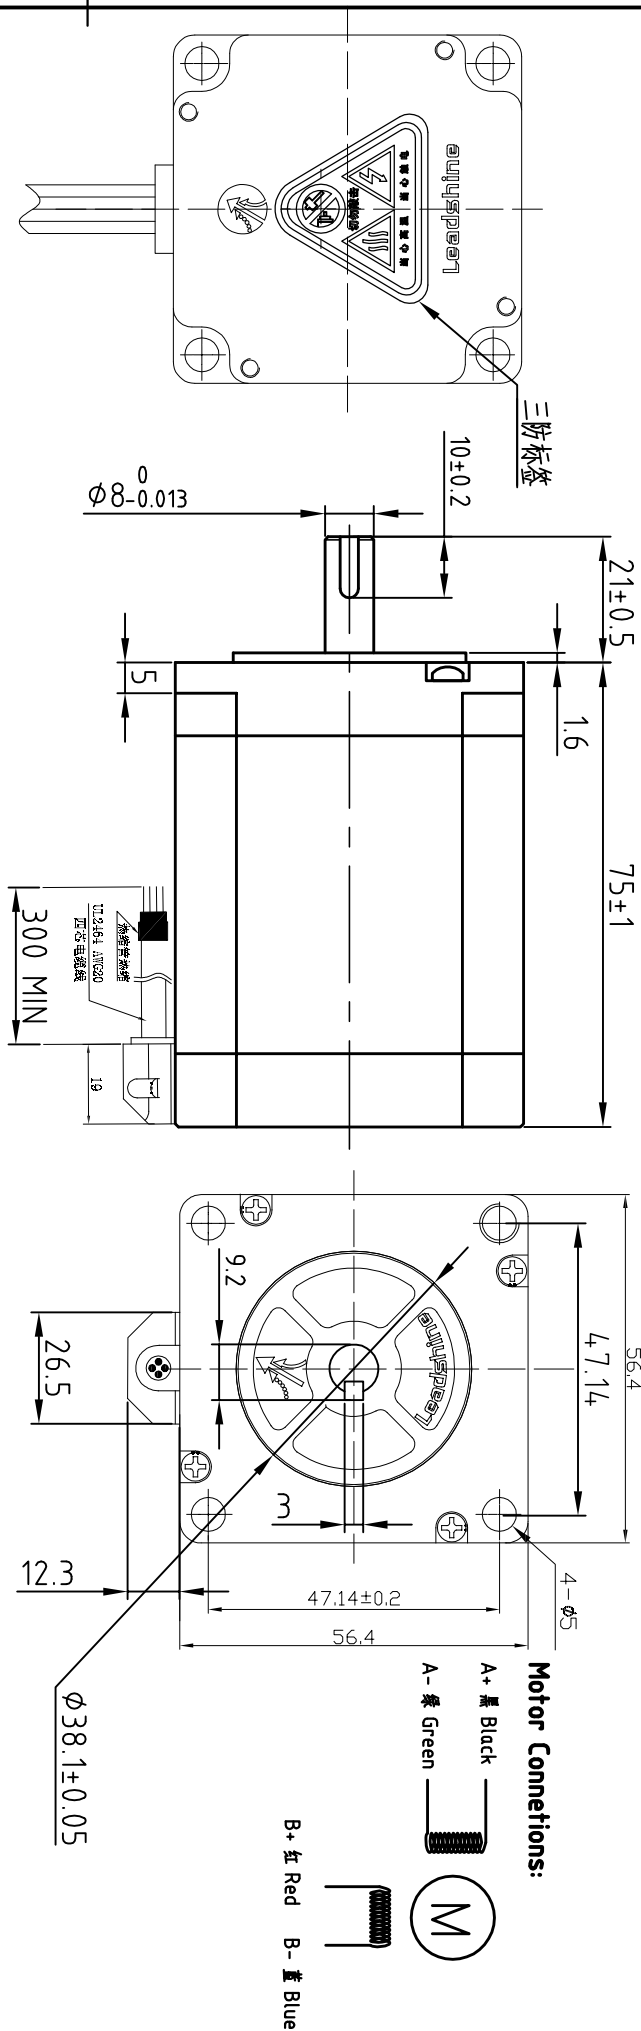

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase $\pm 10\%$	0.38 Ω
Inductance/phase $\pm 20\%$	1.6 mH
Holding torque	2.3 N • M
Detent torque	0.068 N • M
Inertia	0.480 kg • cm ²
Weight	1.1 kg

设计	王洪松	日期	2020.10.31		材料	Material				深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
审核	黄梓建		2020.10.31		第一角画法	First Angle projection			名称		混合式步进电机		
检查			2020.10.31		重量	Weight	比例	Scale	请标注	Stage Mark			
批准	黄梓建		2020.10.31								57CM23-K		
审核编号	Sheet No.				图号	DWG. NO.							
					共 1 张	第 1 张	Sheet 1 of 1						

版本 Version	日期 Date	交互文件号 ECN NO.	交互内容 Revisions	设计 By
V1.0	2010.10.31		带缺漏	王洪林