
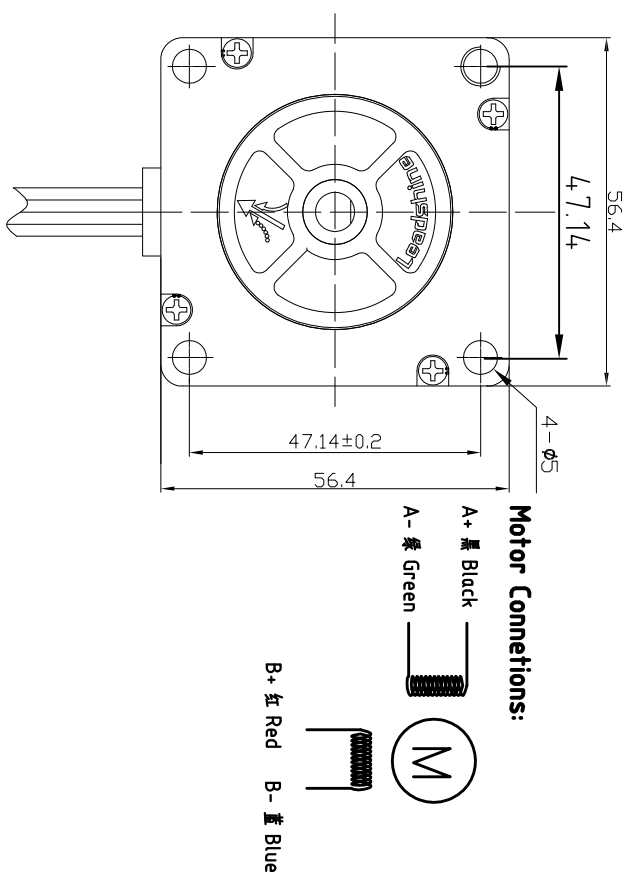


Dimension: (Unit: mm)

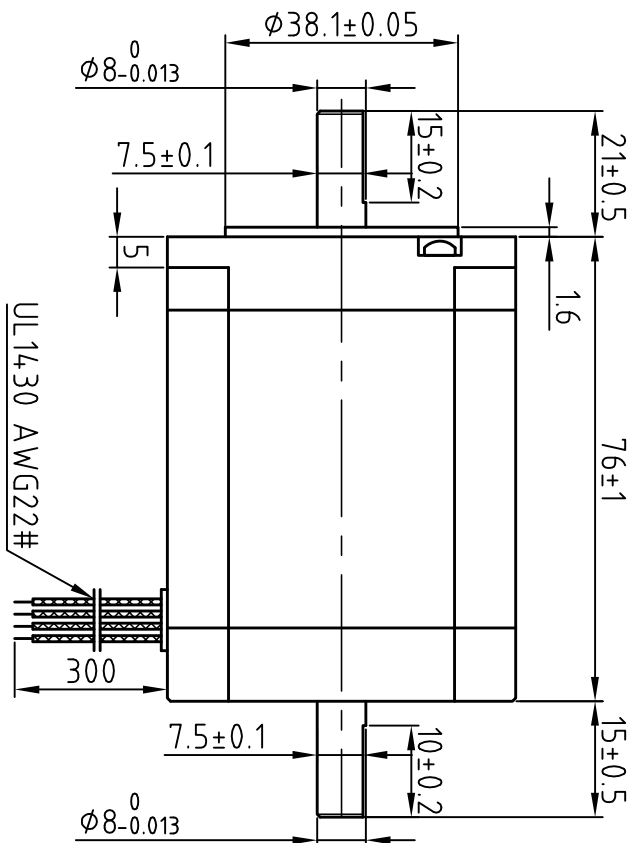

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase $\pm 10\%$	0.38 Ω
Inductance/phase $\pm 20\%$	1.75 mH
Holding torque	2.3 N·M
Detent torque	0.068 N·M
Inertia	0.480 kg·cm ²
Weight	1.1 kg

设计		王崇崇		日期		2017.04.12		材料		深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
Designed				Date							
审核		刘福峰		2017.04.12				第一角画法 First Angle projection			
Checked								重量 Weight		比例 Scale	
批准		田文胜		2017.04.12				图例标记 Stage Mark			
Approved											
图号 Draw No.		共 1 张 第 1 张		Sheet 1 of 1		图号 DWG NO.		混合式步进电机		57CM23	

版本 Rev	日期 Date	交互文件号 ECM NO.	交互内容 Revisions	设计 by
V1.0	17.04.12		初版	王洪彬