


Dimension: (Unit: mm)

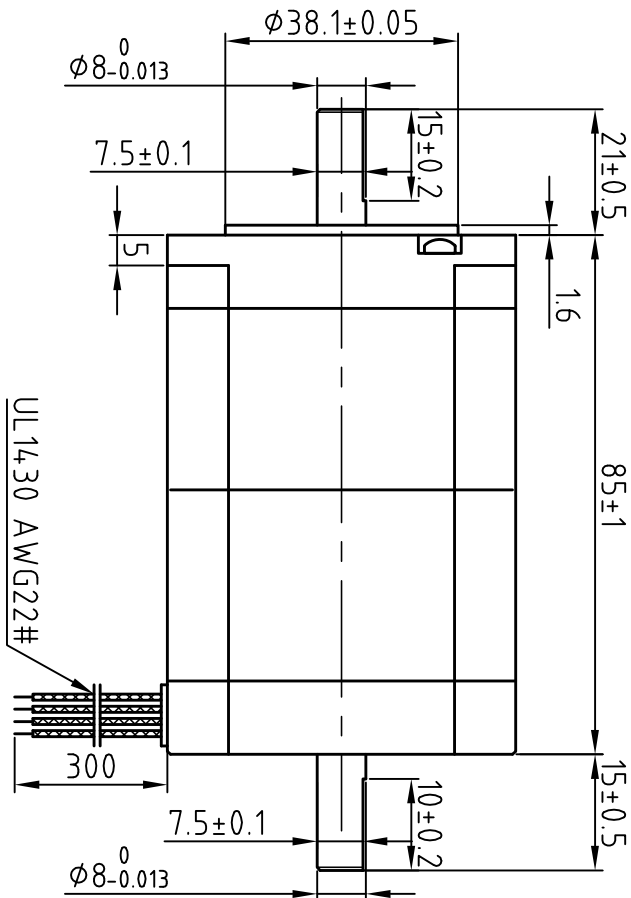


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)


Specification:

Current/phase	5.0 A
Voltage	3.2 V
DC Resistance/phase ±10%	0.44Ω
Inductance/phase ±20%	2.0 mH
Holding torque	2.6 N·M
Detent torque	0.068 N·M
Inertia	0.480 kg·cm ²
Weight	1.4 kg

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.04.24		初版	王洪林

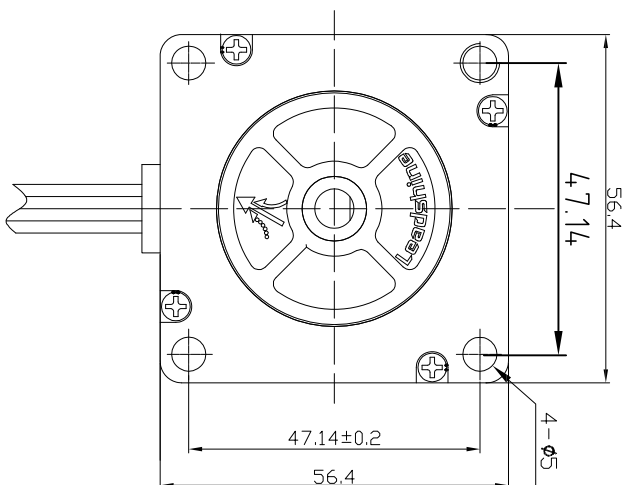

Motor Connctions:



设计 Designed	王洪林	日期 Date	2017.04.24	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		2017.04.24	第一角画法 First Angle projection	
批准 Approved	田天胜		2017.04.24	重量 Weight 比例 Scale 请标注 Stage Mark	混合式步进电机 57CM26-SZ
图号 Part No.		共 1 套 第 1 套 Sheet 1 of 1		图号 DWG. NO.	