


Dimension: (Unit: mm)

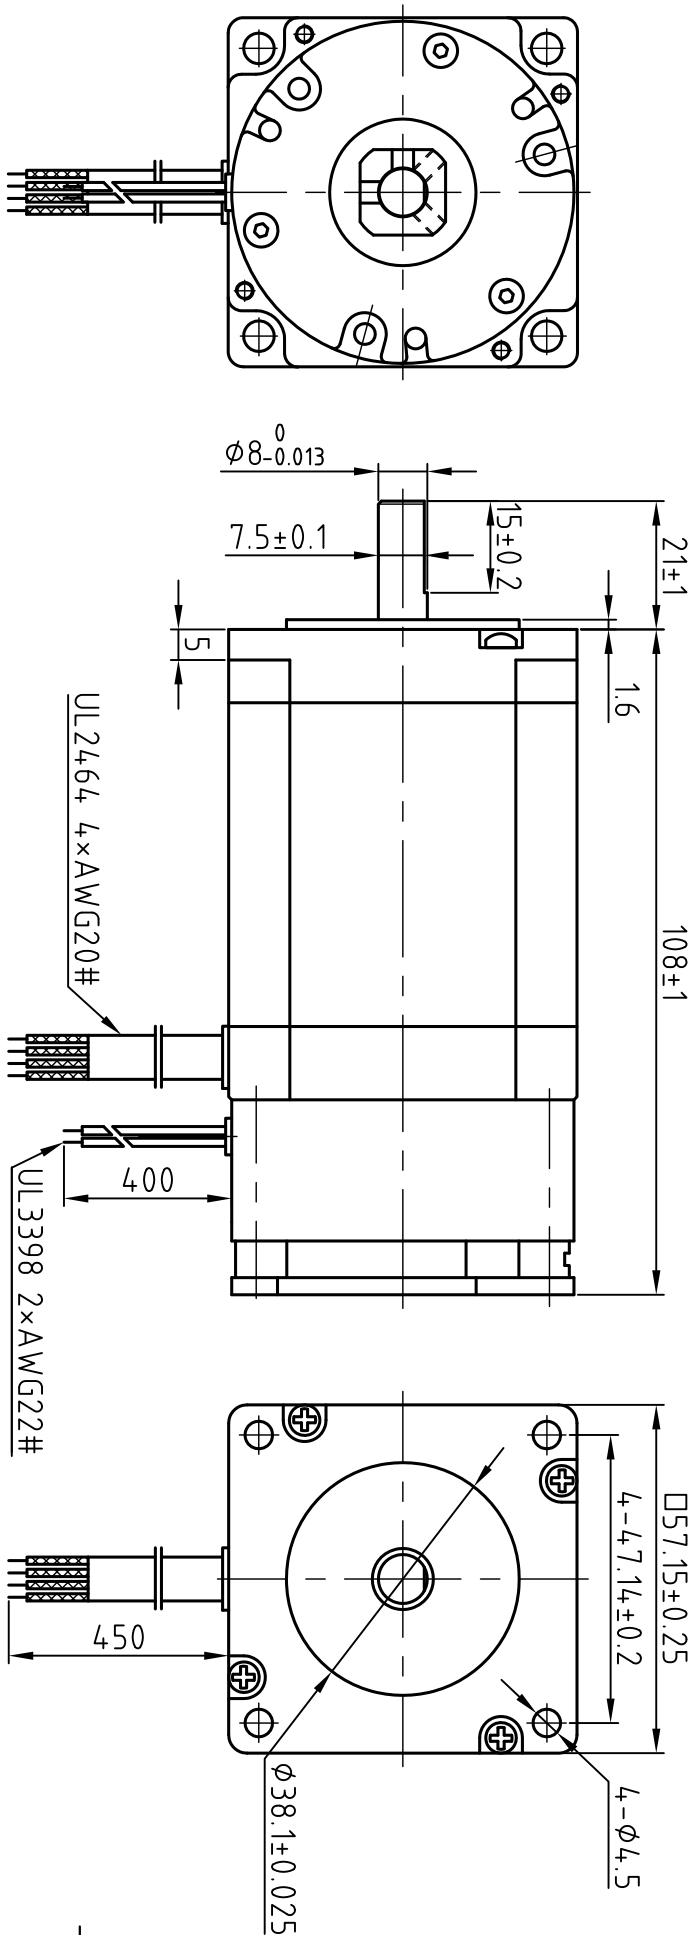


Motor Specification:

Step angle	18°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)
Current/phase	5.0 A
Voltage	2.0 V
DC Resistance/phase ±10%	0.4 Ω
Inductance/phase ±20%	1.8 mH
Holding torque	2.1 N·M
Inertia	0.52 kg·cm ²
Weight	1.5 kg


Brake Specification:

Static friction torque	1 N·M
Voltage	24 V
Wattage	9 W
Armature pull in time	0.01 S
Armature release time	0.01 S
Rotating inertia	0.038 kg·cm ²
Heat resistance class	F

Motor Connctions:

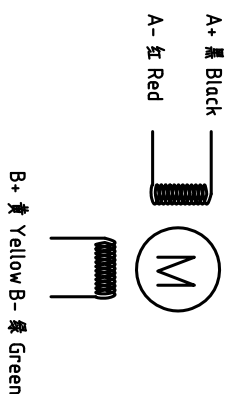

Brake Connctions



设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First Angle projection	带刹车器步进电机
批准 Approved		重量/Weight 比例/Scale 阶段标志/Stage Mark	57HS22-S (带刹车) V1.1
图号 Part No.		共 1 套 第 1 套 Sheet 1 of 1	图号 DWG. NO.