



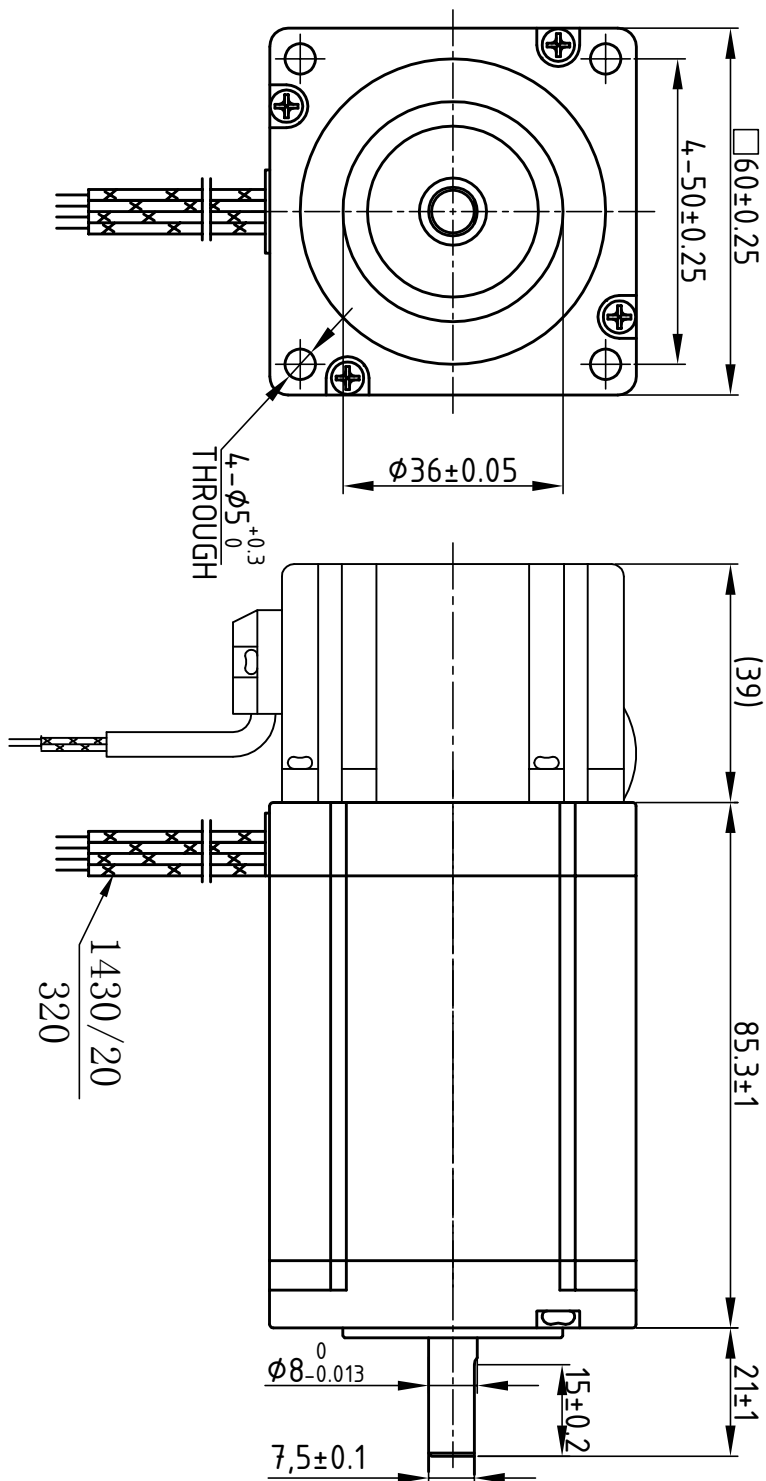


版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	18.10.19		新增	王林林

Motor Connctions:

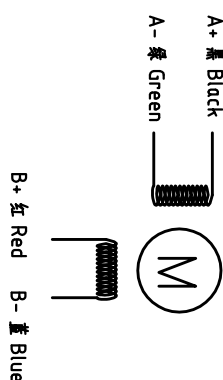

Brake Connections



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500V/AC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	3.3 V
DC Resistance/phase ±10%	0.43Ω
Inductance/phase ±20%	2.0 mH
Holding torque	3.0 N·M
Inertia	0.69 kg·cm ²
Weight	1.3 kg

设计 Designed	王洪松	日期 Date	2018.10.19	材料 Material	第一角画法 First angle projection	图例 Title	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	2018.10.19		重量 Weight	比例 Scale	图例 Title	混合式步进电机
批准 Approved	黄捷建	2018.10.19		共 1 套 1 套	第 1 套 1 套	图例 Title	60CM30X-BZ
图号 Part No.				共 1 套 1 套	第 1 套 1 套	图例 Title	60CM30X-BZ