

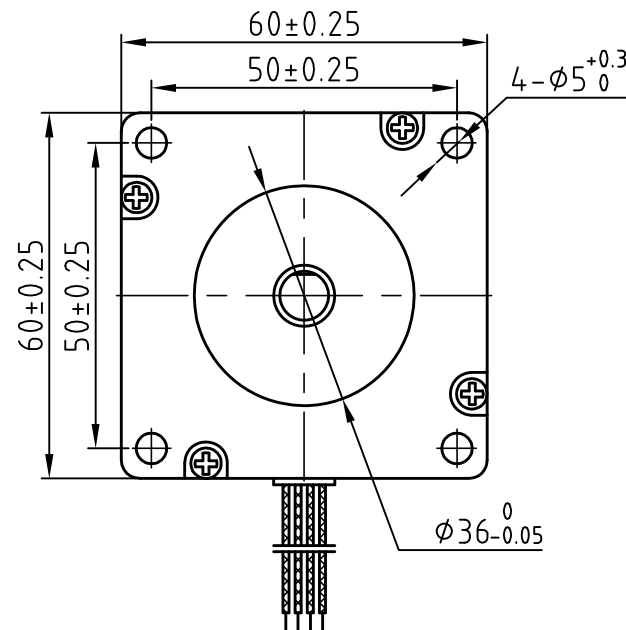


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	
V1.0	16.12.17		60底座, 3Nm	王军

Dimension: (Unit: mm)

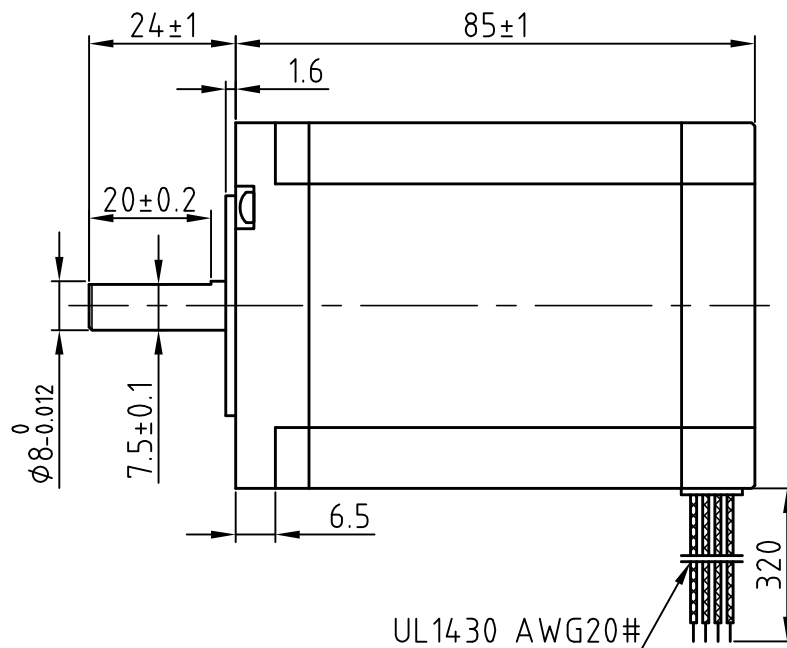

Motor Connections:

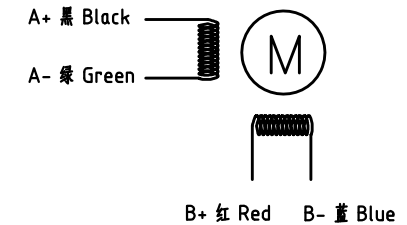

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	2.3 V
DC Resistance/phase ±10%	0.57Ω
Inductance/phase ±20%	2.7 mH
Holding torque	3.0 N·M
Inertia	0.69 kg·cm ²
Weight	1.3 kg

设计 Designed		日期 Date		材料 Material		深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked				第一角画法 First Angle projection		名称 Title Hybrid Stepper Motor
批准 Approved				重量Weight	比例Scale	阶段标记Stage Mark
料号 Part No.				共 1 张 第 1 张	Sheet 1 of 1	图号 DWG. NO. 60HS30A