

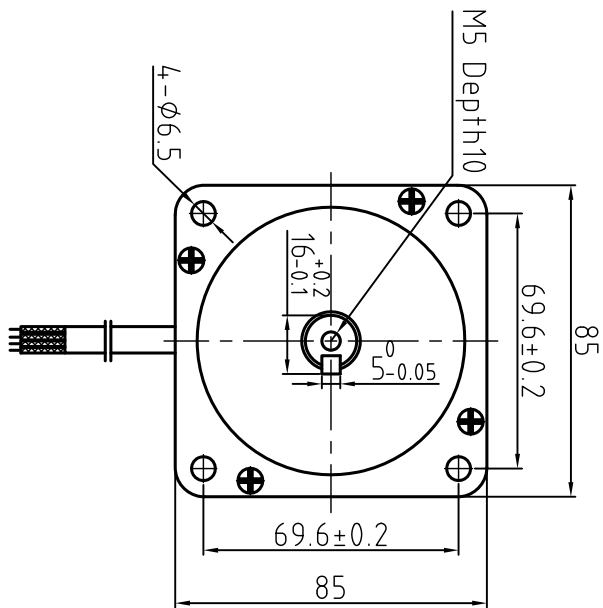


Dimension: (Unit: mm)

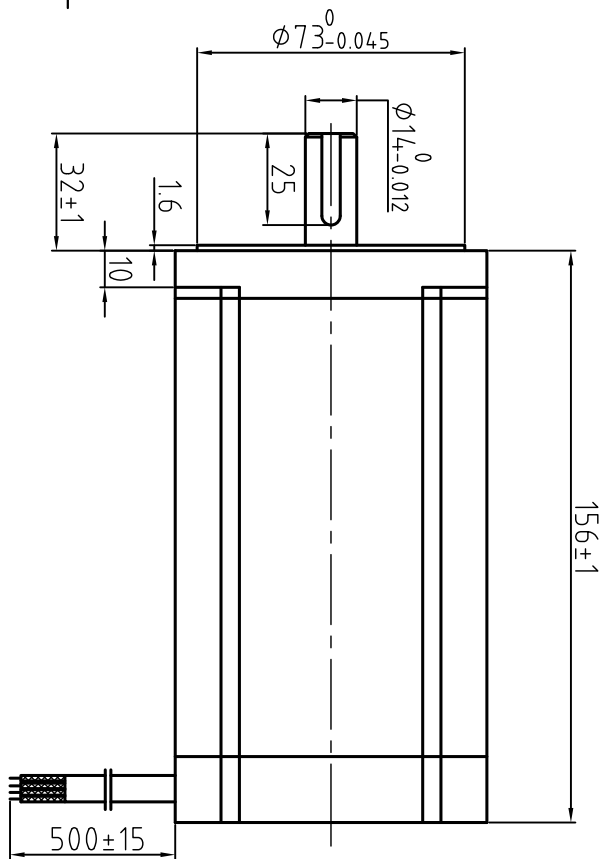

Motor Connections

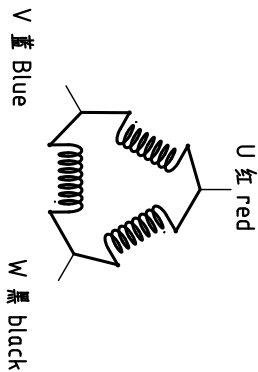

Common Rating

Step angle	1.2°
Position accuracy	1.2±0.06°
Dielectric strength	1500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	F
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	3.0 A
Voltage	7 V
DC Resistance/phase	2.34 Ω
Inductance/phase	18.33 mH
Holding torque	12 N•M
Inertia	4.0 kg•cm²
Weight	5.2 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First angle projection	混合式步进电机
批准 Approved		重量/Weight	863S120E
图号 Part No.		比例/Scale	
		阶段/Stage Mark	
		图号 DWG. NO.	
		共 1 页 第 1 页 Sheet 1 of 1	