



版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	18.11.7		带拖尾	

Dimension: (Unit: mm)

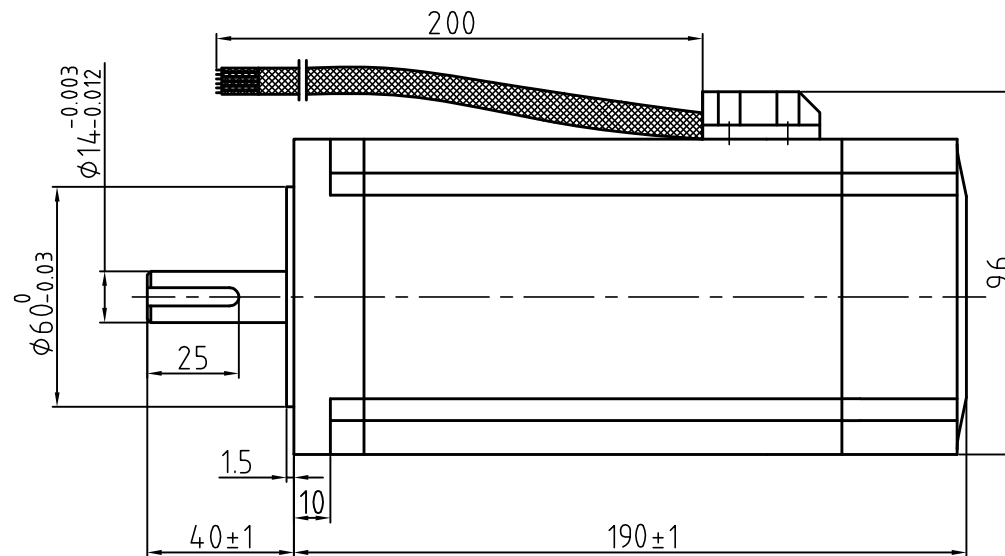

M5 Depth 10

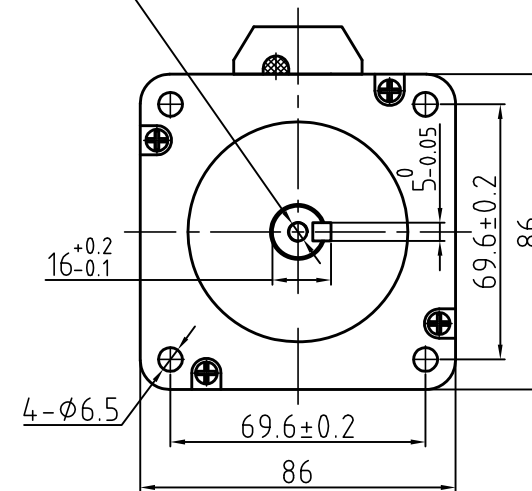


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	1500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6 A
Voltage	4.2 V
DC Resistance/phase ±10%	0.7 Ω
Inductance/phase ±20%	5.6 mH
Holding torque	12 N·M
Inertia	4.8 kg·cm²
Weight	5.8 kg

Motor Connctions

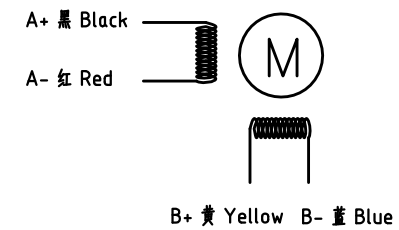

Brake Specification

Voltage	24Vdc
Friction torque	4N·M

Brake Connctions

绿 Green 白 White



设计 Designed	日期 Date	18.11.7	材料 Material	雷创智能科技有限公司
审核 Checked			第一角画法 First Angle projection	名称 Title
批准 Approved			重量Weight 比例 Scale 阶段标记 Stage Mark	步进电机
料号 Part No.			共 1 张 第 1 张 Sheet 1 of 1	86CM120-BK
				图号 DWG. NO.