


Dimension: (Unit: mm)

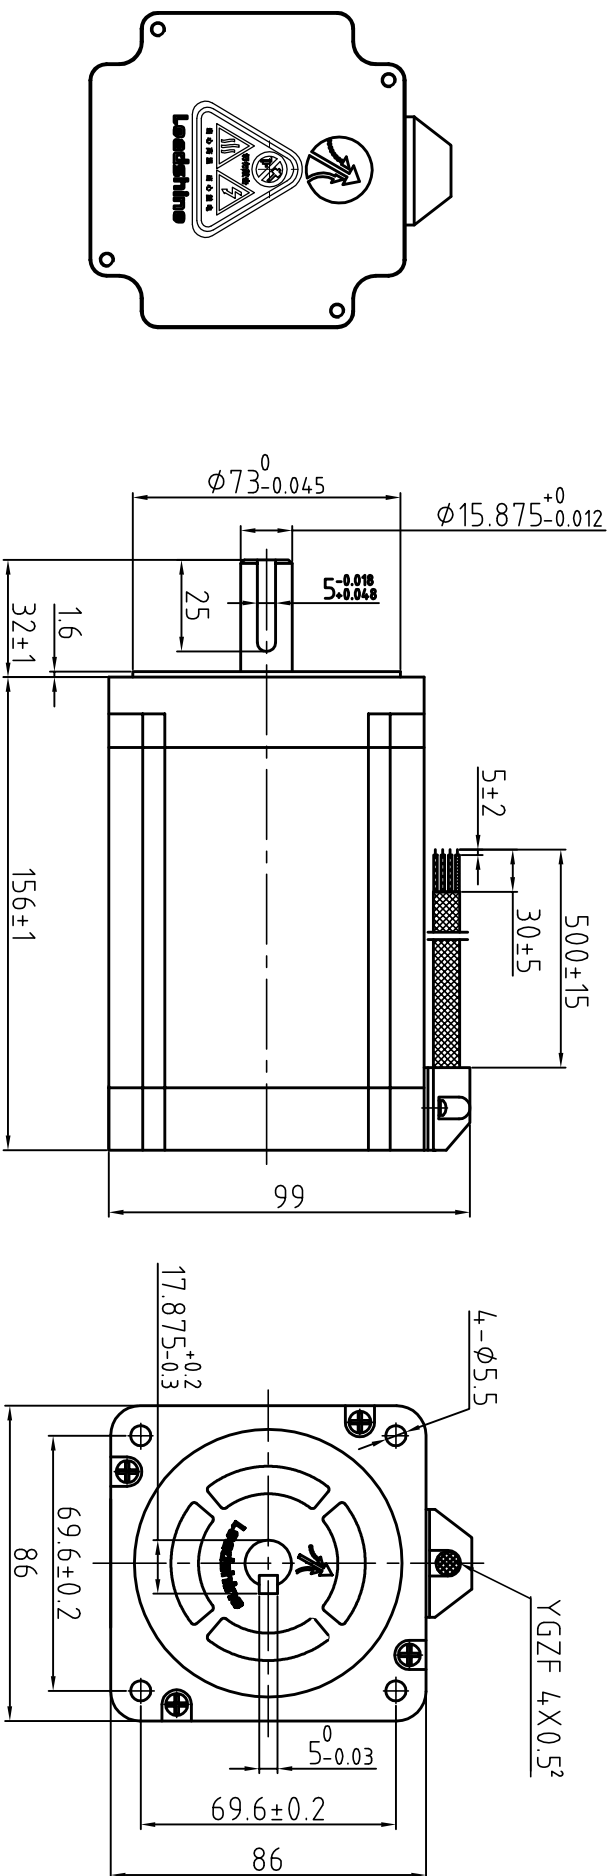


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.9 V
DC Resistance/phase	±10% 0.65 Ω
Inductance/phase	±20% 6.8 mH
Holding torque	12 N·M
Inertia	4.0 kg·cm ²
Weight	4.45 kg

Motor Connctions

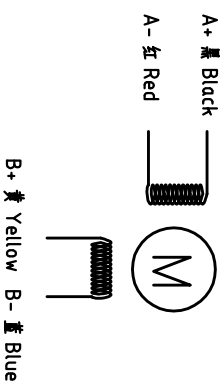

设计 Designed	王洪松	日期 Date	18.10.30	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄捷建	18.10.30	第一角画法 First Angle projection	比例 Scale	混合式步进马达
批准 Approved	黄捷建	18.10.30	重量 Weight	比例 Scale	86CM125
图号 Part No.			共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	

版本 Ver.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	18.10.30		制 LOGO	王洪松