

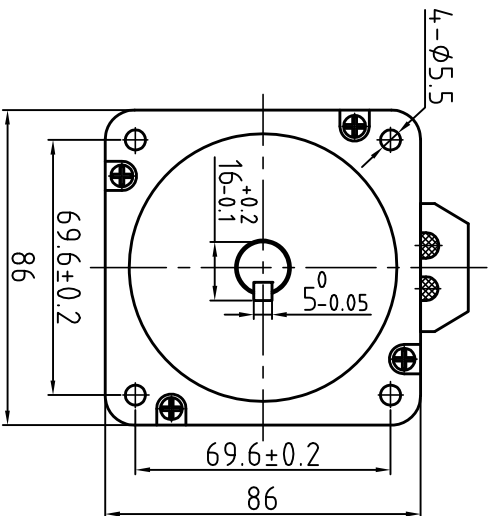


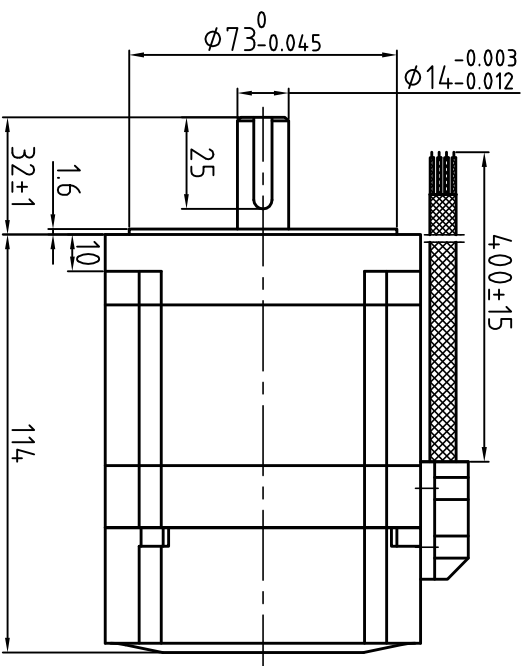

Motor Connctions

A+ 黑 Black

A- 红 Red



B+ 黄 Yellow B- 蓝 Blue



Brake Connctions

绿 Green 白 White



Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification

Current/phase	4.2 A
Voltage	3.2 V
DC Resistance/phase	±10% 0.51 Ω
Inductance/phase	±20% 4.7 mH
Holding torque	4.6 N·M
Inertia	2.0 kg·cm ²
Weight	2.5 kg

Brake Specification

Voltage	24Vdc
Friction torque	4N·M

设计 Designed	王洪松	日期 Date	17.11.8	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		17.11.8	第一角画法 First Angle projection	混合式步进电机
批准 Approved	田天胜		17.11.8	重量 Weight	86CM4.5-BZ
图号 Part No.		共 1 页 第 1 页	Sheet 1 of 1	图例 DMG. NO.	