
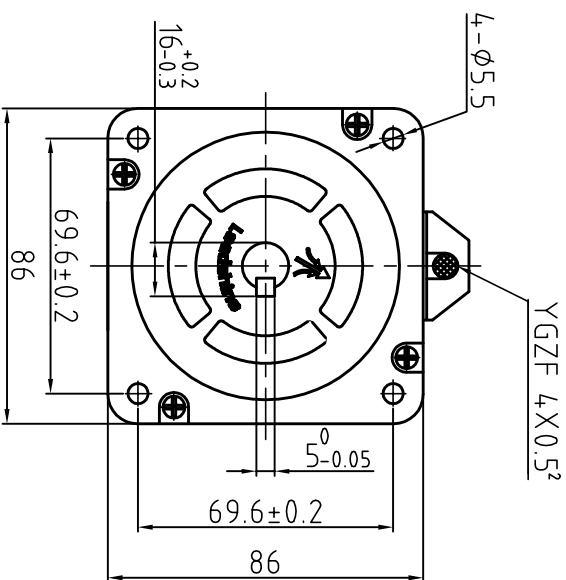
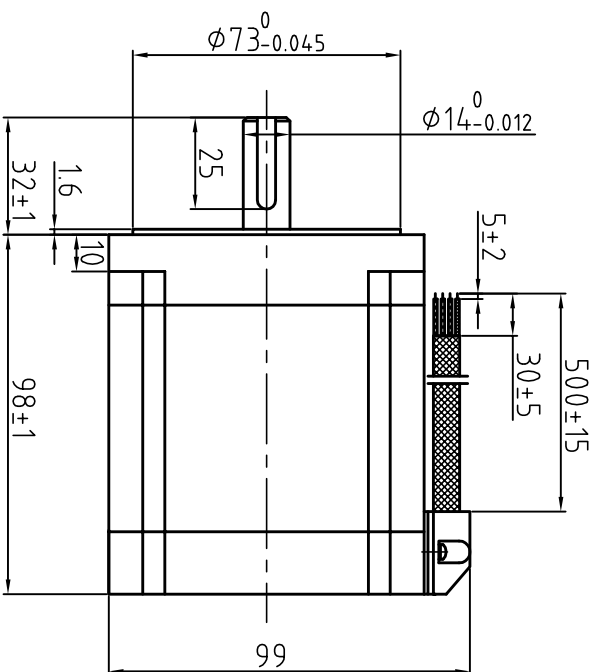


Dimension: (Unit: mm)

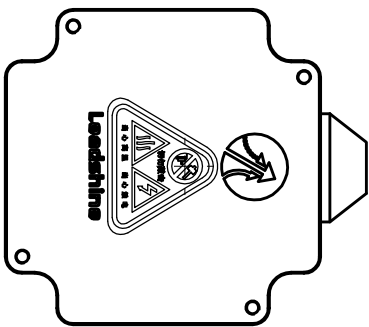


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	6.0 A
Voltage	3.8 V
DC Resistance/phase	0.5 Ω
Inductance/phase	4.2 mH
Holding torque	8 N·M
Inertia	2.8 kg·cm²
Weight	4 kg

Motor Connctions

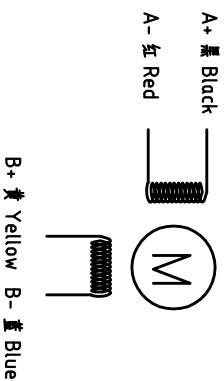

设计 Designed	王瑞松	日期 Date	19.6.17	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	黄雄章	19.6.17	第一角画法 First Angle projection	图例 Symbol	混合式步进马达
批准 Approved	黄雄章	19.6.17	重量 Weight	比例尺 Scale	86CM80-0-114
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.			

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0			带 LOGO, 轴径 14	王瑞松