
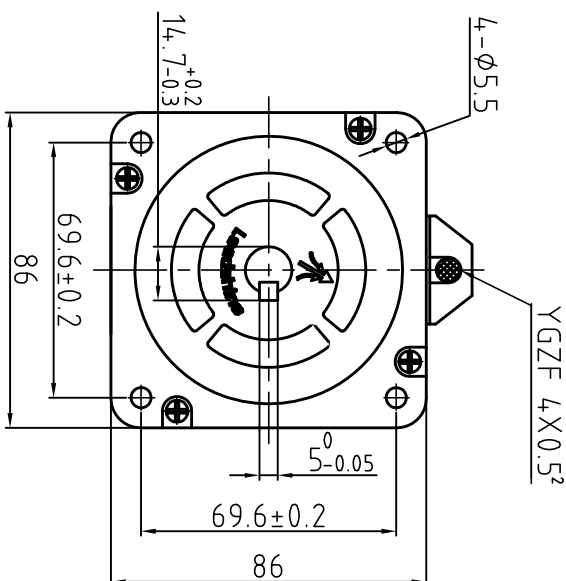
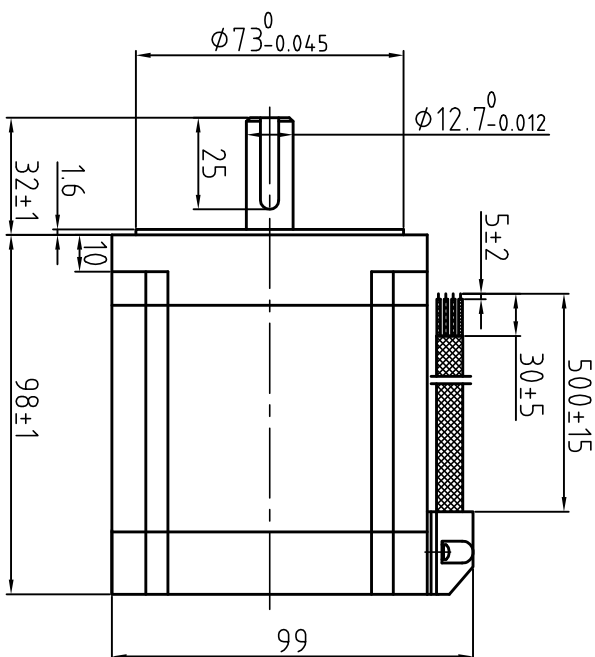


Dimension: (Unit: mm)

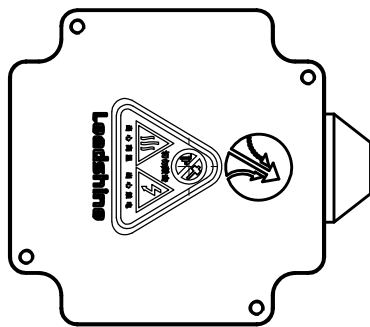


Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	6.0 A
Voltage	38 V
DC Resistance/phase	0.5 Ω
Inductance/phase	4.2 mH
Holding torque	8 N·M
Inertia	2.8 kg·cm²
Weight	4 kg

Motor Connctions

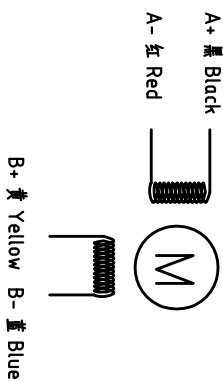

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0			带 LOGO	王洪松

设计 Designed	王洪松	日期 Date	17.8.1	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		17.8.1	第一角画法 First Angle projection	混合式步进马达
批准 Approved	田天胜		17.8.1	重量 Weight 比例 Scale 修改标记 Stage Mark	86CM80
图号 Part No.		共 1 页 第 1 页 Sheet 1 of 1		图号 DWG. NO.	