


Dimension: (Unit: mm)

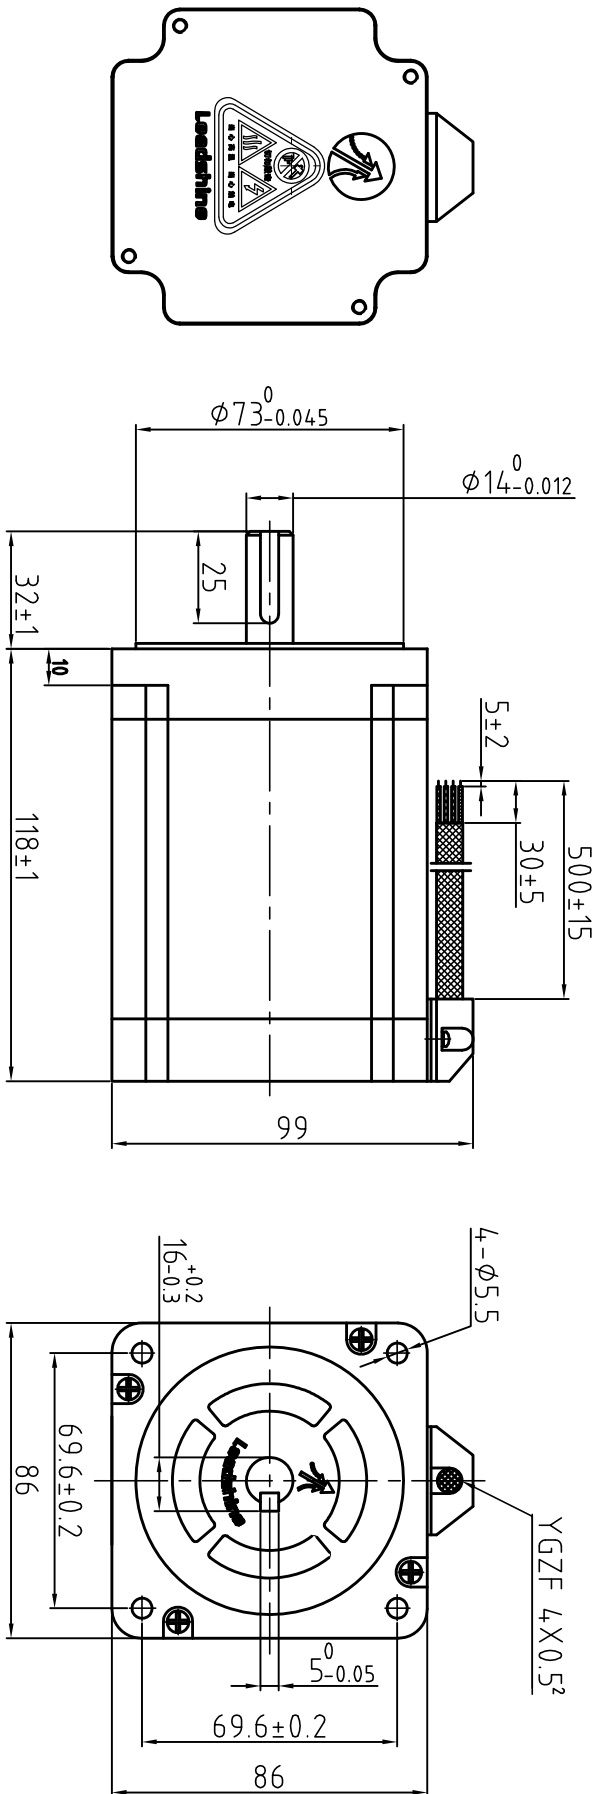


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.53 Ω
Inductance/phase	4.25 mH
Holding torque	8.5N•M
Inertia	2.7 kg•cm²
Weight	3.8 kg

Motor Connections

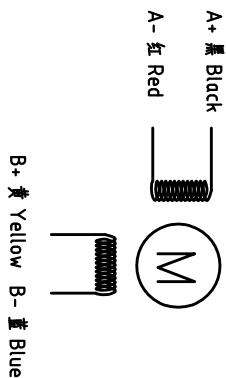

设计 Designed	王洪松	日期 Date	17.11.10	材料 Material	第一角画法 First Angle projection	标题 Title	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		17.11.10	重量 Weight	比例 Scale	阶段标记 Stage Mark	
批准 Approved	王洪松		17.11.10				
图号 Part No.				共 1 页 第 1 页 Sheet 1 of 1		图号 DWG. NO.	86CM85-0-114

版本 Rev:	日期 Date	变更文件号 ECN NO.	变更日期 Revisions	设计 By
V1.0	17.11.10		插径 14mm	王洪松