

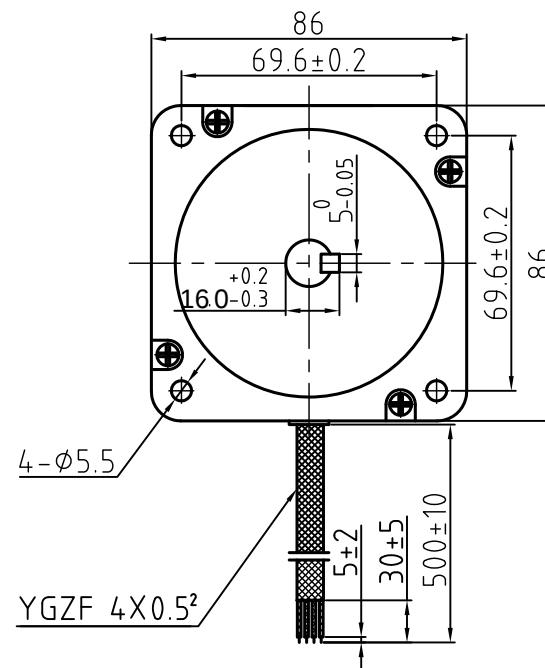


Dimension: (Unit: mm)

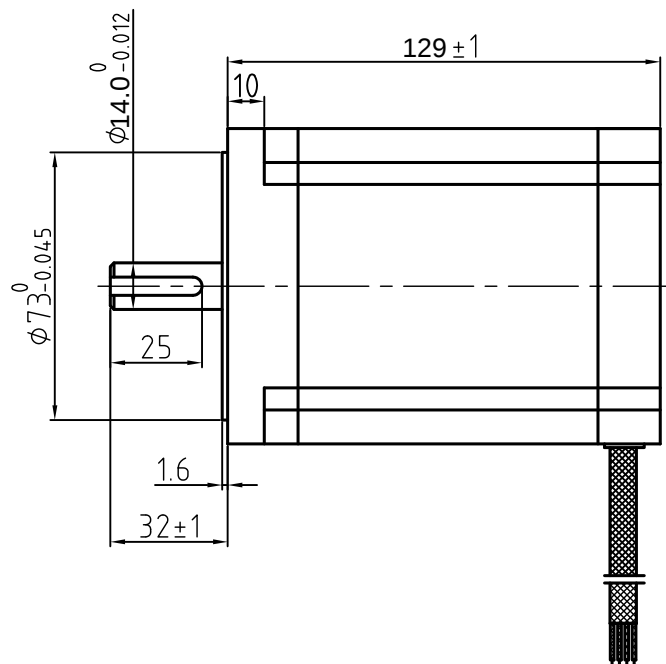

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	王军
14.4.9			初版, 型号: 86HS80	王军
14.8.4			更改型号为: 86HS85D	王军

Motor Connctions

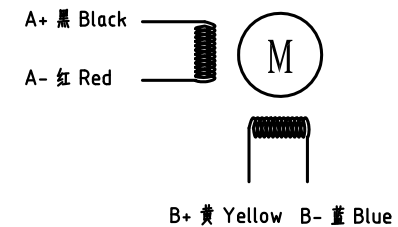

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.83Ω
Inductance/phase	7.8mH
Holding torque	12.0N·M
Inertia	2.94 kg·cm²
Weight	4.45 kg

设计 Designed		日期 Date		材料 Material		深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked				第一角画法 First Angle projection		名称 Title 混合式步进马达
批准 Approved				重量 Weight	比例 Scale	阶段标记 Stage Mark
料号 Part No.				共 1 页 第 1 页 Sheet 1 of 1		图号 DWG. NO. 86HS120D