

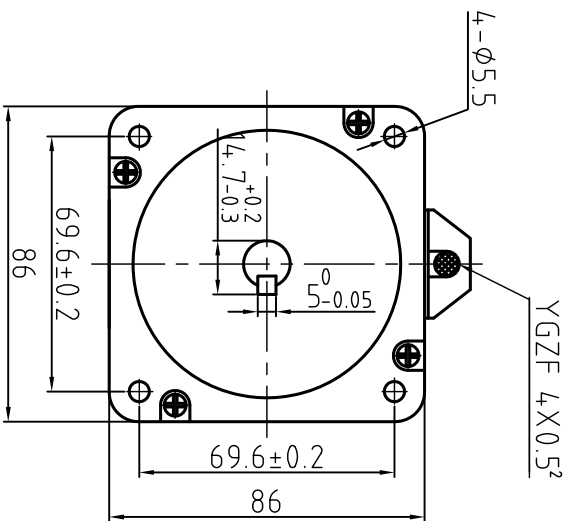


Dimension: (Unit: mm)

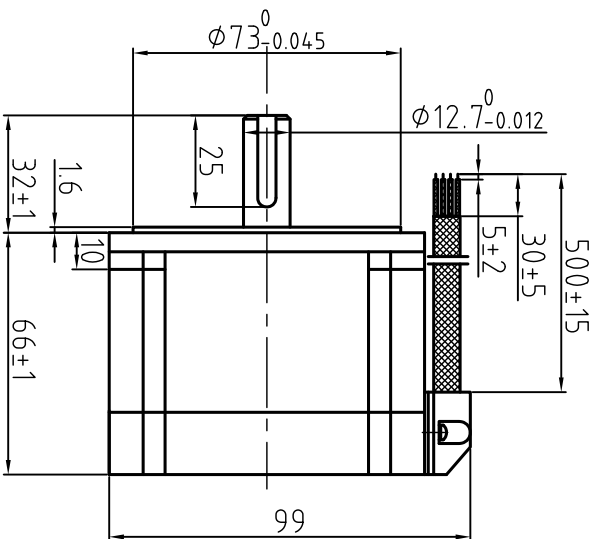

Motor Connctions

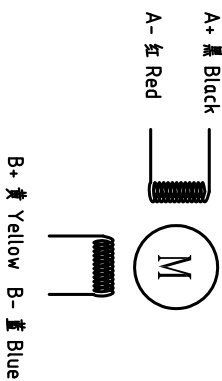

Common Rating

Step angle	1.8°
Position accuracy	18±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	3 V
DC Resistance/phase	0.83 Ω
Inductance/phase	5.2 mH
Holding torque	3.5 N·M
Inertia	16 kg·cm ²
Weight	1.9 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First Angle projection	混合式步进马达
批准 Approved		重量 Weight	86HS35D
图号 Part No.		比例 Scale	
		阶段标记 Stage Mark	
		图号 DWG. NO.	
		共 1 套 第 1 套 Sheet 1 of 1	