

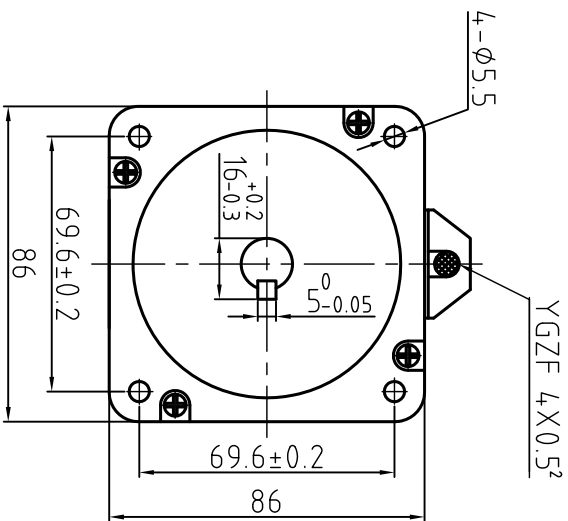


Dimension: (Unit: mm)

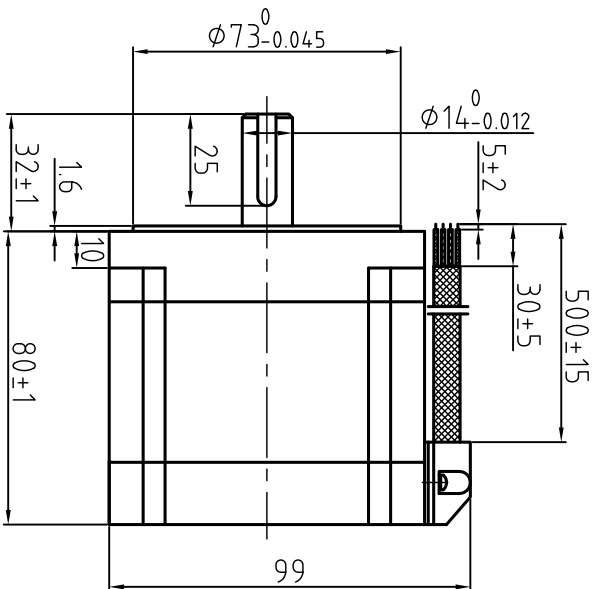

Motor Connctions

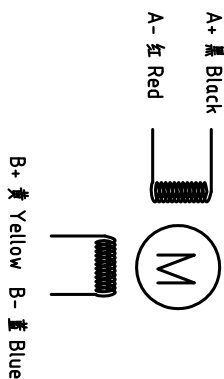

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	3 V
DC Resistance/phase	0.47 Ω
Inductance/phase	3.6 mH
Holding torque	4.5N•M
Inertia	195 kg•cm²
Weight	2.5 kg

设计	日期	材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核		第一角画法 First Angle projection	混合式步进马达
批准		重量 Weight	86HS45D-M
批准		比例 Scale	
批准		阶段标志 Stage Mark	
批准		图号 Part No.	图号 DWG. NO.
共 1 张	第 1 张	Sheet 1 of 1	