



Dimension:

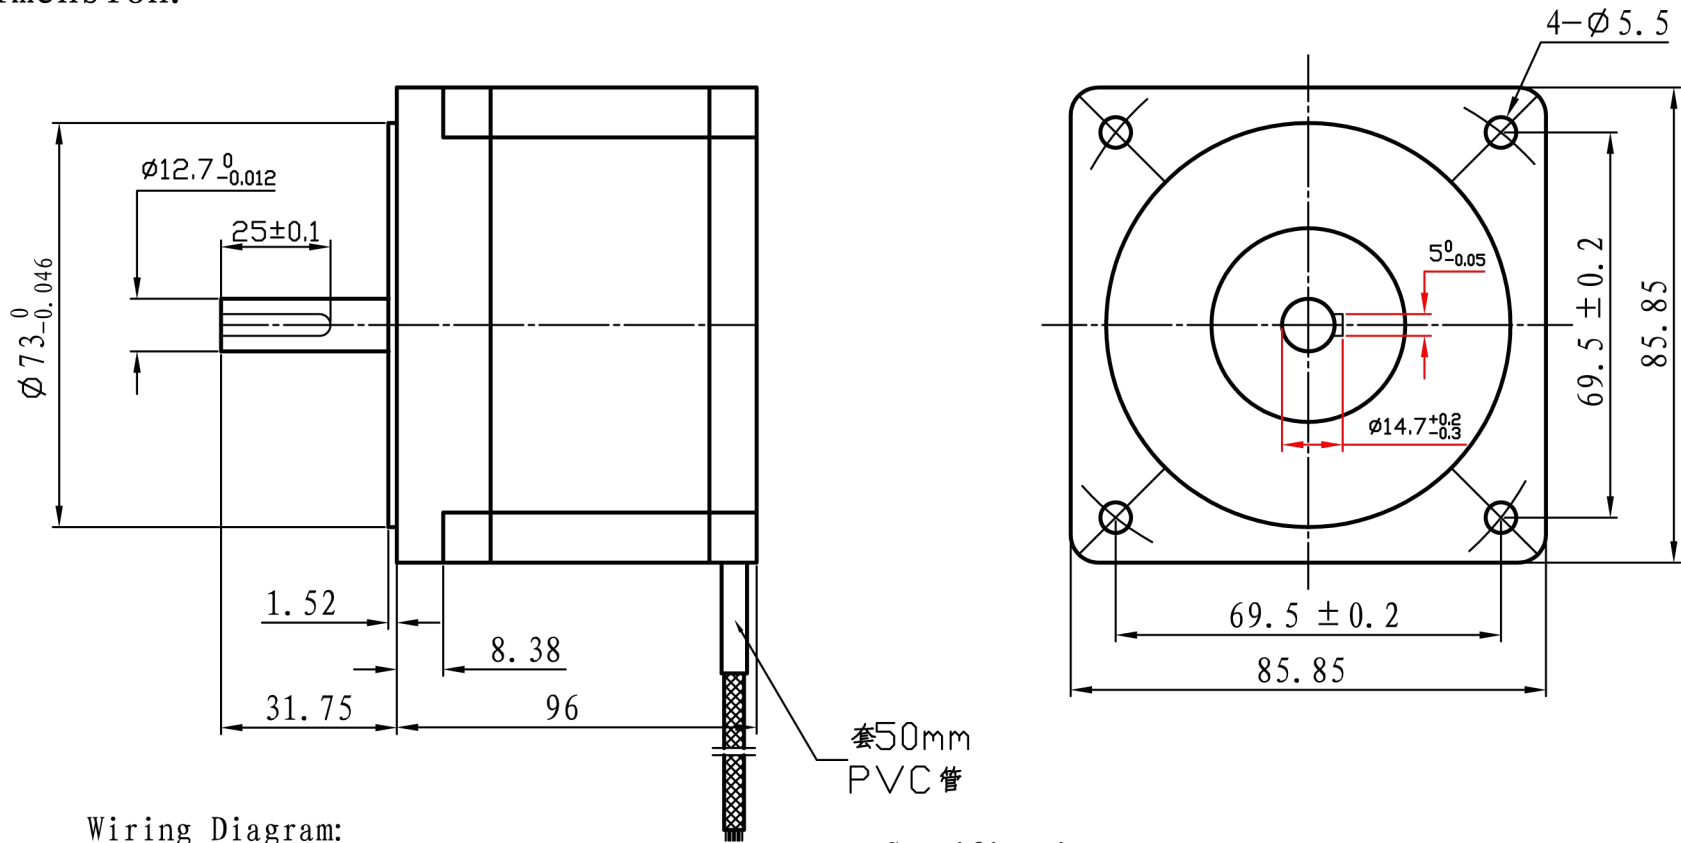


Wiring Diagram:

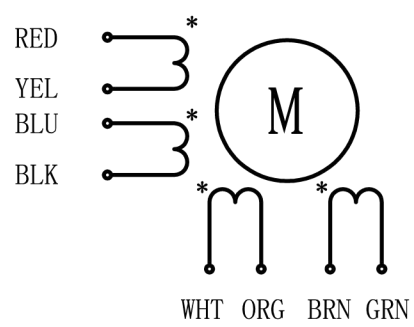

引出线从电机引出时套50mmPVC管
红黄蓝黑白橙棕绿
1430-AWG20#长500mm

Specifications:

PHASE	STEP ANGLE	CONNECTION STYLE	CURRENT	RESISTANCE	INDUCTANCE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
	DEG/STEP		A	ohms	mH	N.m	gcm ²	Kg
4	1.8	parallel	6.1	0.35	3.3	7.0	1400	2.3
		series	3.05	1.4	13.2			
		unipolar	4.3	0.7	3.3	4.9		

A	08092501	Han 平台改为5*5*25的键				DESIGN	DATE	P/N.	
REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE			TITLE	
UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS: ANGULAR: .x ±0.5 .xx ±0.25 .xxx ±0.1 UNIT: mm DO NOT SCALE DRAWING			MATERIAL			CHECK		SPECIFICATIONS	
								USED ON	86HS65
			THIRD ANGLE PROJECTION 			APPD		DWG NO.	REV
						SCALE		深圳市雷赛智能控制股份有限公司	
						SHEET	OF		