

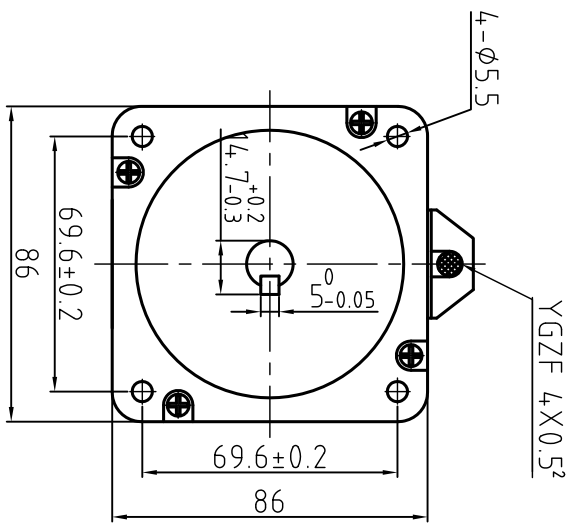


Dimension: (Unit: mm)

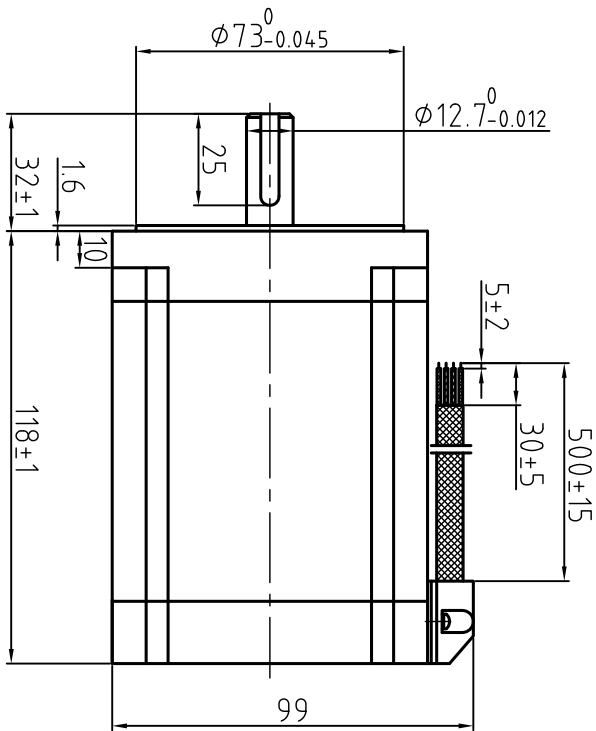

Motor Connctions

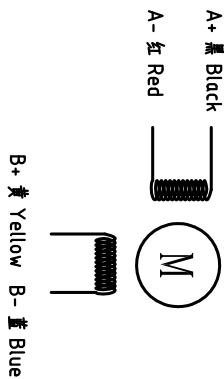

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	14.8.4		型号为: 86HS85D	王平
V1.1	14.9.15		增加压线块, 改为轴向出线	王平

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.5 Ω
Inductance/phase	4.2 mH
Holding torque	8.5N•M
Inertia	2.8 kg•cm²
Weight	4 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First Angle projection	混合式步进马达
批准 Approved		重量 Weight 比例 Scale 除权标志 Stage Mark	86HS85D
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图样 DWG. NO.	