

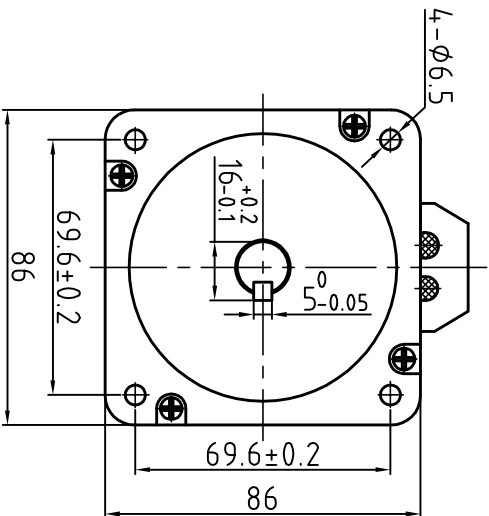


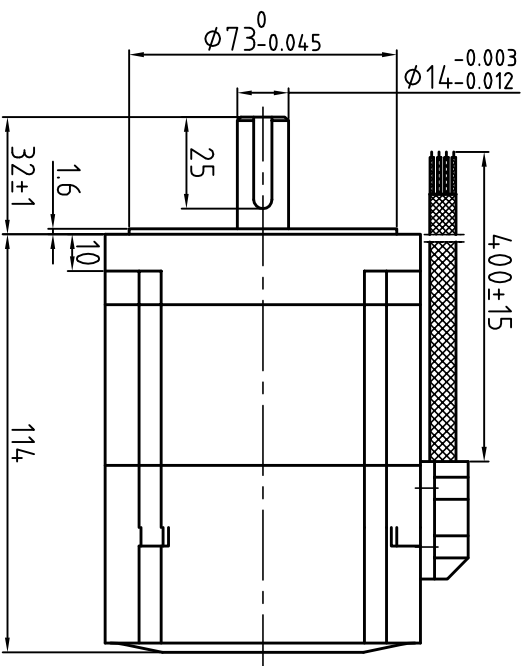

Motor Connctions

A+ 黑 Black

A- 红 Red



B+ 黄 Yellow B- 蓝 Blue

Brake Connctions

绿 Green 白 White



Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 450g)
Axial play	Max:0.08mm(Load 900g)

Specification

Current/phase	4.2 A
Voltage	3.2 V
DC Resistance/phase	±10% 0.51 Ω
Inductance/phase	±20% 4.7 mH
Holding torque	4.6 N·M
Inertia	2.0 kg·cm ²
Weight	2.5 kg

Brake Specification

Voltage	24Vdc
Friction torque	4N·M

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First angle projection	混合式步进电机
批准 Approved		重量Weight 比例Scale	86HSB4.5E
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图样 DWG. NO.	