


Dimension: (Unit: mm)

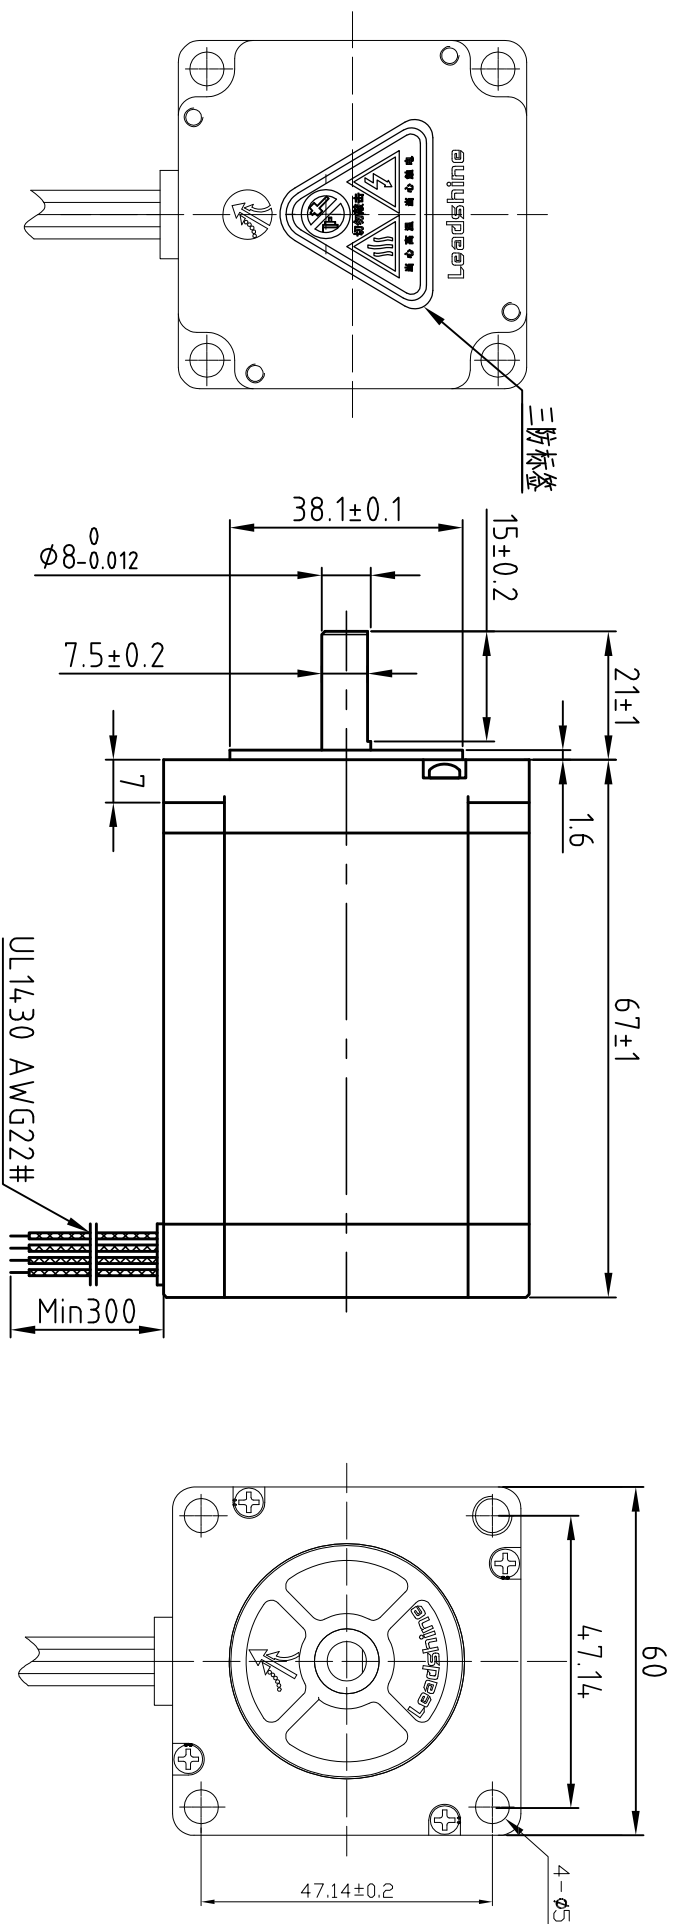

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(1oad 4.50g)
Axial play	Max.0.08mm(1oad 900g)

Specification:

Current/phase	4.0 A
Voltage	2.0 V
DC Resistance/phase $\pm 10\%$	0.5 Ω
Inductance/phase $\pm 20\%$	1.77 mH
Holding torque	2.1 N•M
Inertia	0.57 kg•cm ²
Weight	1.2 kg

Motor Connections:

A+ 黒 Black

A- 绿 Green

B+ 红 Red B- 蓝 Blue

设计		王洪松	日期	2017.05.08		材料		深圳市 雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
Designed			Date			Material			
审核	刘佩峰	2017.05.08	第一角画法 First Angle projection				名称 Title		混合式步进电机
Checked			重量Weight		比例Scale	图例标注Sizing Mark			
批准	田天胜	2017.05.08							
Approved									
制件 Part No.	共 1 张 第 1 张		Sheet 1 of 1		图号 DWG NO.				

版本 Rev.	日期 Date	变更文件号 ECI NO.	变更内容 Revisions	设计 By
V1.0	17.05.08		第57版变更	王洪林