


Dimension: (Unit: mm)

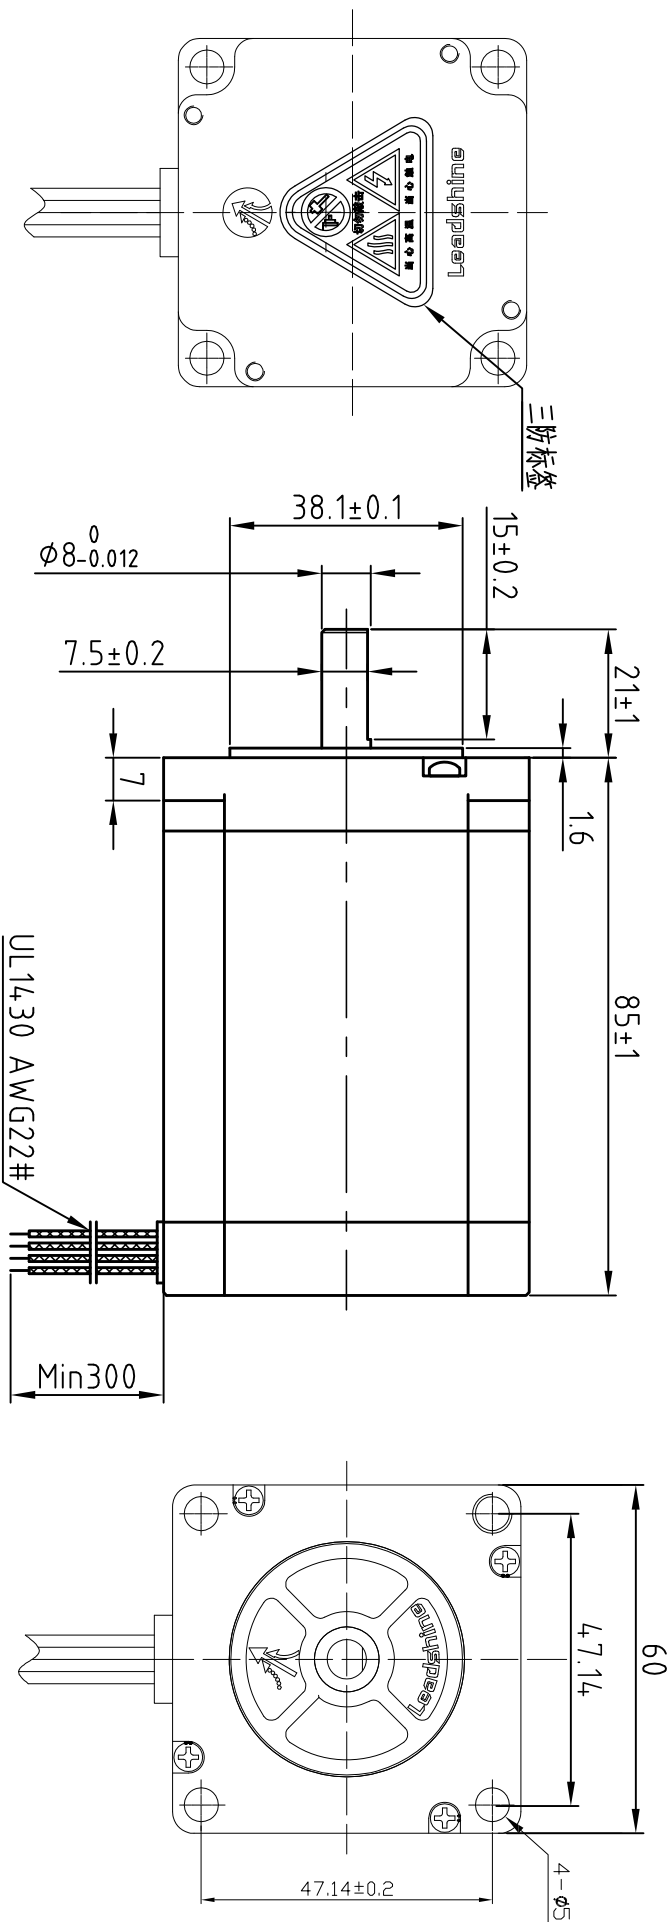


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100M Ω h(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	156 V
DC Resistance/phase $\pm 10\%$	0.62 Ω
Inductance/phase $\pm 20\%$	2.8 mH
Holding torque	3.1 N·M
Inertia	0.84 kg·cm ²
Weight	1.4kg

Motor Connctions:

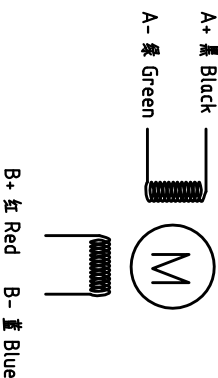

设计 Designed	王洪松	日期 Date	2017.05.08	材料 Material	第一角画法 First Angle projection	名称 Title	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰		2017.05.08		重量 Weight	比例 Scale	图例 Legend
批准 Approved	田天胜		2017.05.08		图例 Legend	图例 Legend	图例 Legend
图号 Part No.					共 1 页 第 1 页 Sheet 1 of 1		图号 DWG. NO.

混合式步进电机
D57CM31-4A