
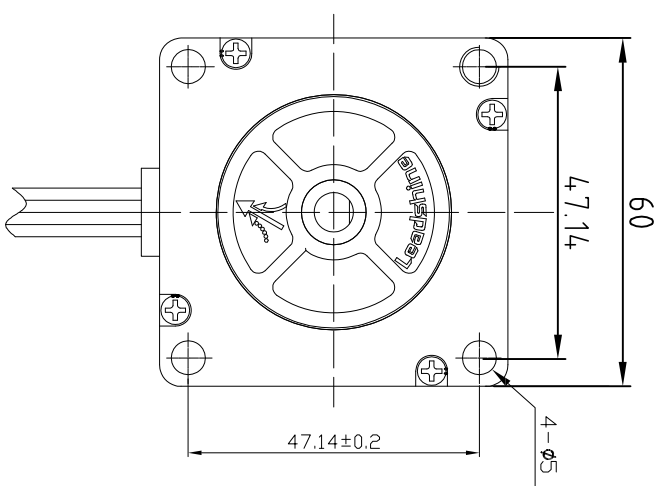


Dimension: (Unit: mm)

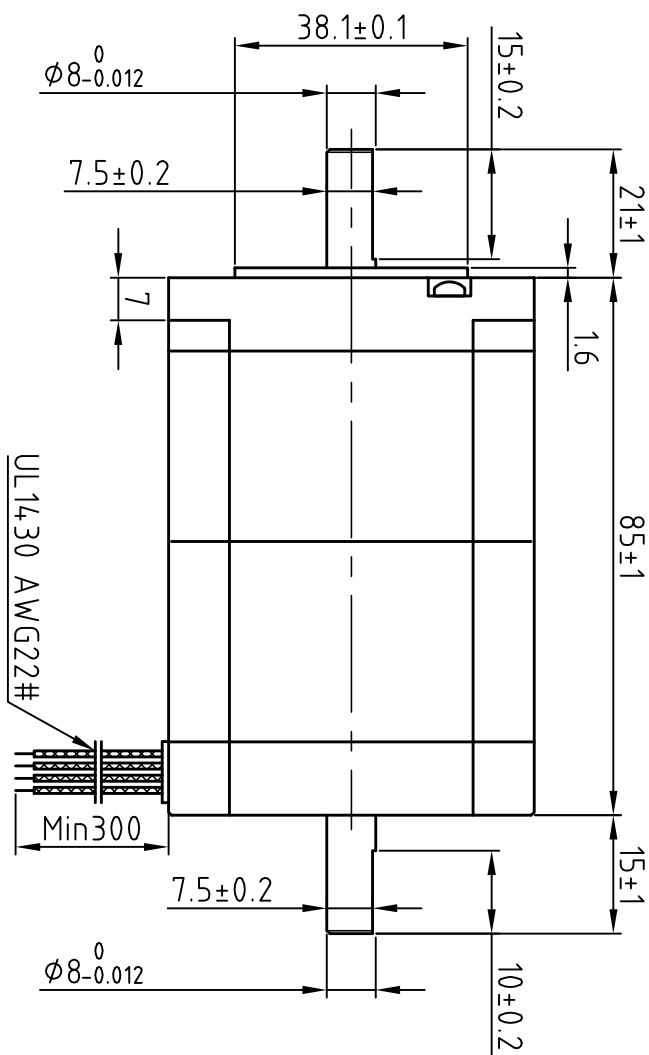

版本 Rev.	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By
V1.0	17.10.20		系统功能需求	王林峰

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 450g)
Axial play	Max.0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	2.0 V
DC Resistance/phase $\pm 10\%$	0.4 Ω
Inductance/phase $\pm 20\%$	1.8 mH
Holding torque	3.1 N • M
Inertia	0.84 kg • cm ²
Weight	1.4kg

Motor Connections:

A+ 黑 Black

A- 绿 Green

B+ 红 Red B- 蓝 Blue

设计		王洪松	日期	2017.10.20		材料		深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.	
Designed			Date			Material			
审核		刘佩峰	2017.10.20		第一角画法 First Angle projection		名称 Title		
Checked					比例 Scale		混合式步进电机		
批准		田天胜	2017.10.20		重量 Weight		D57CM31-SZ		
Approved					图例标记 Stage Mark				
Sheet No.		共 1 张 第 1 张		Sheet 1 of 1		图号 DWG. NO.			